

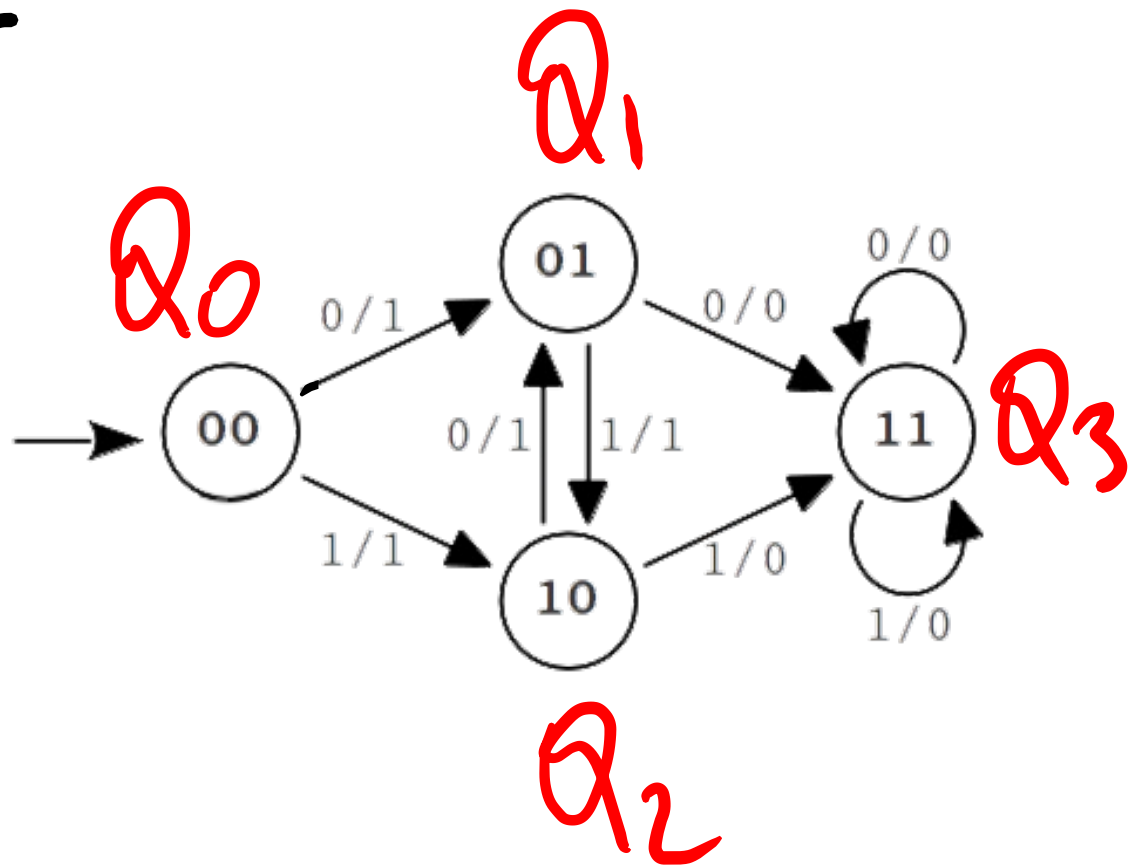
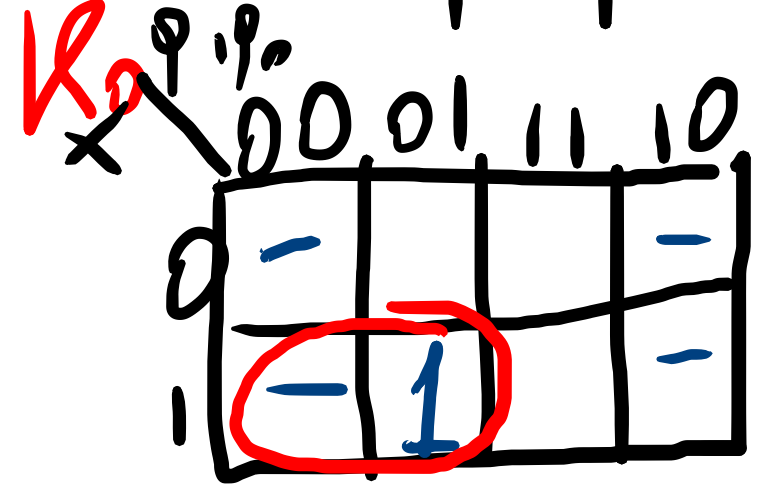
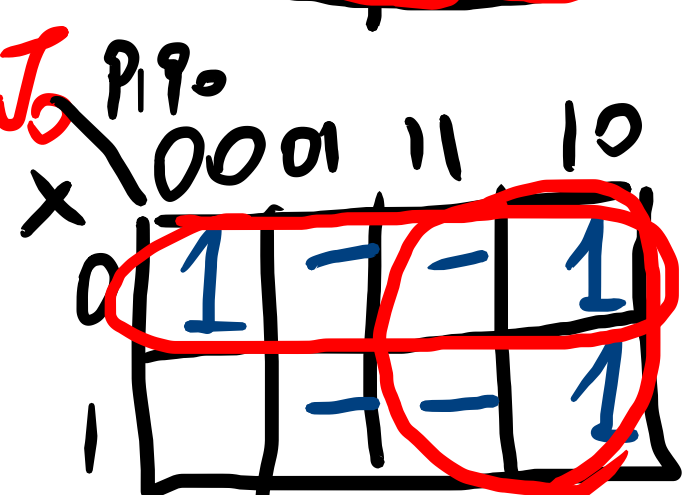
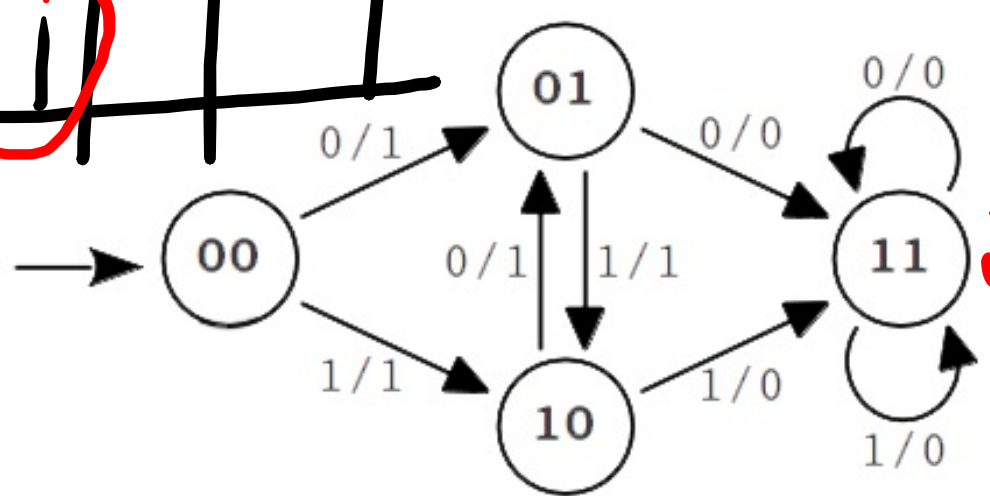
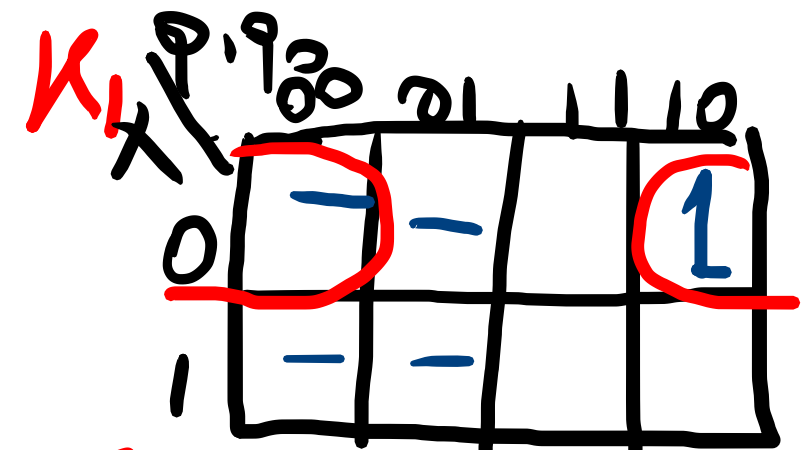


X	0	1
Q ₀	Q ₁ /1	Q ₂ /1
Q ₁	Q ₃ /0	Q ₂ /1
Q ₂	Q ₁ /1	Q ₃ /0
Q ₃	Q ₃ /0	Q ₃ /0

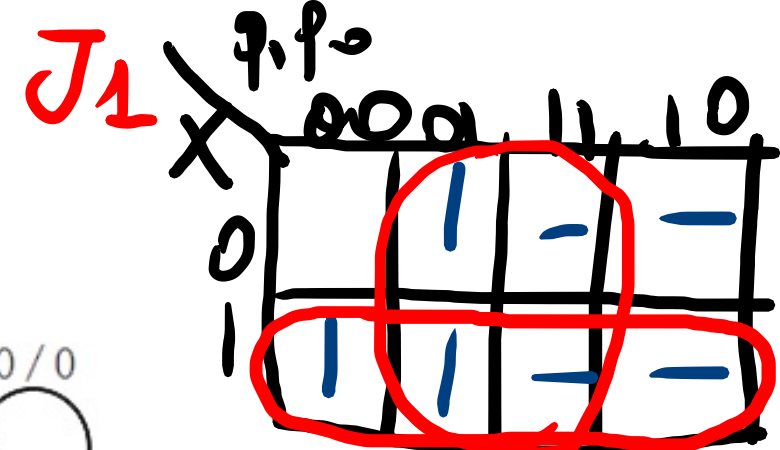

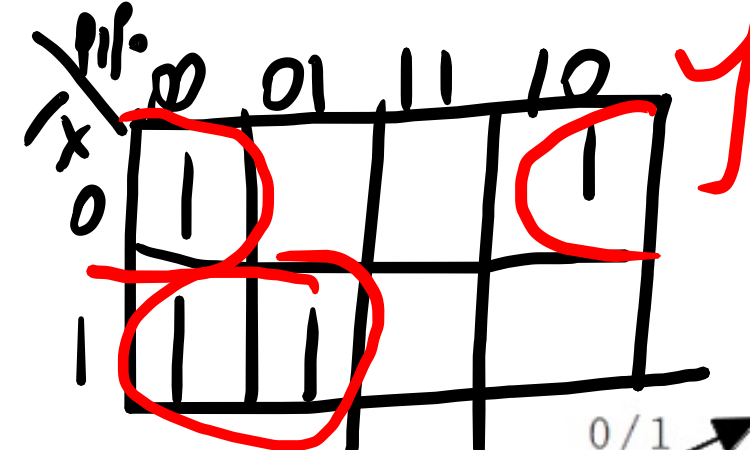

$J_1 = q_0 + x$
 $K_1 = \bar{q}_0 \cdot \bar{x}$
 $J_0 = q_1 + \bar{x}$
 $K_0 = \bar{q}_1 \cdot x$
 $y = q_1 \cdot x + \bar{q}_0 \cdot \bar{x}$

q1	q0	x	q'1	q'0	y	J1	K1	J0	K0
0	0	0	0	1	1	0	-	1	-
0	0	1	1	0	1	1	-	0	-
0	1	0	1	1	0	1	-	-	0
0	1	1	1	0	1	1	-	-	1
1	0	0	0	1	1	-	1	1	-
1	0	1	1	1	0	-	0	1	1
1	1	0	1	1	0	-	0	-	0
1	1	1	1	1	0	-	0	-	0

