

Cloud e Datacenter Networking

Università degli Studi di Napoli Federico II

Dipartimento di Ingegneria Elettrica e delle Tecnologie dell'Informazione DIETI

Laurea Magistrale in Ingegneria Informatica

Prof. Roberto Canonico

Datacenter: storage systems organization








- ▶ **Storage options for datacenter servers**
- ▶ **Shared storage infrastructures: NAS vs SAN**
- ▶ **Network convergence for storage infrastructures**
- ▶ **iSCSI and FCoE**

Storage options for rack servers




- ▶ Rack servers may usually be configured with a number of options for internal storage
- ▶ Hard disks directly connected to the server's motherboard in the server chassis form the so called *Direct Attached Storage (DAS)*
- ▶ Form factors include both 3,5" and 2,5" disks
- ▶ Interfaces include:
 - ▶ SATA (Serial ATA)
 - ▶ SAS (Serial Attached SCSI)
- ▶ SAS requires a SCSI controller but supports disks hot-swapping
- ▶ More recently, *Solid State Disks (SSDs)* can replace or be combined with magnetic hard drives

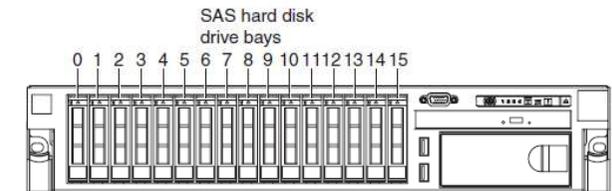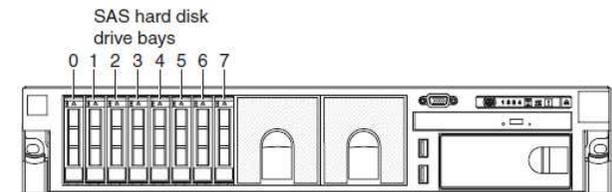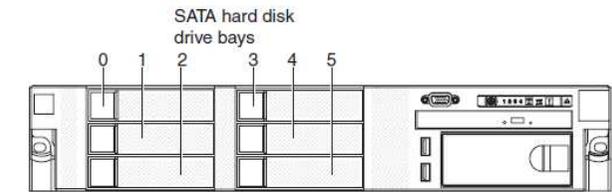

Storage abstractions




- ▶ Storage system provide persistent (i.e. non volatile) data storage
- ▶ Operating systems provide two kind of storage abstractions
 - ▶ **File system**
 - ▶ A system call interface to user space applications
 - ▶ **Block device**
 - ▶ A block device interface to file systems
 - ▶ Through interfaces such as ATA, SATA, SCSI, SAS, FC, etc.

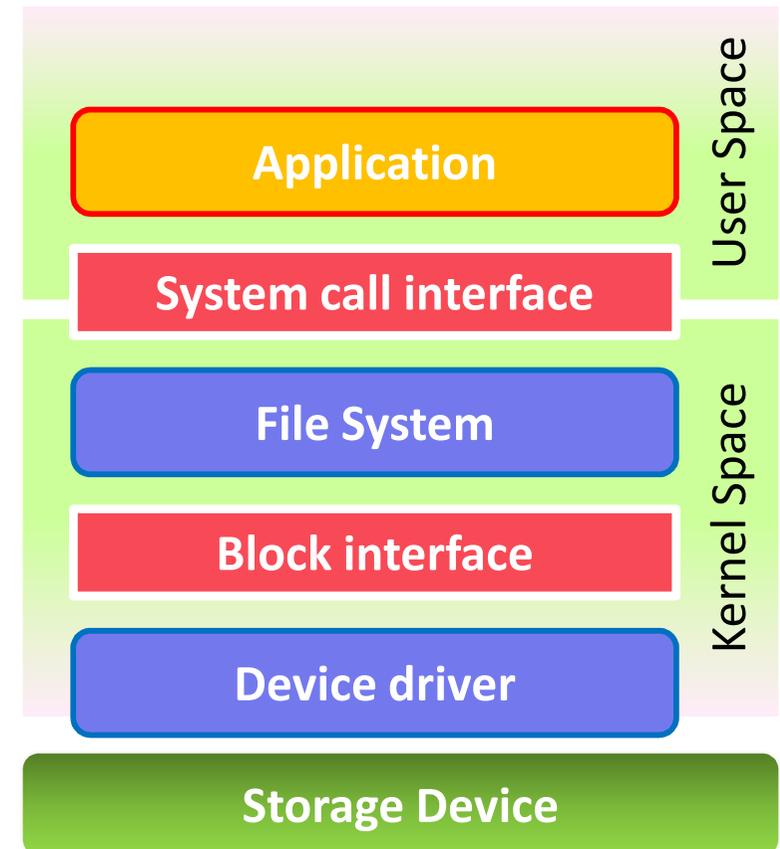

Storage systems in a datacenter



- ▶ To make more efficient use of storage resources, storage in a datacenter is provided by shared devices connected to servers through a *network*
- ▶ Storage is virtualized and resources are shared
- ▶ To connect shared storage devices to servers two approaches can be pursued:
 - ▶ General purpose (Ethernet)
 - ▶ Dedicated technologies (Fibre Channel)
- ▶ Typical approach: separate networks for VM-to-VM traffic and VM-to-Storage traffic

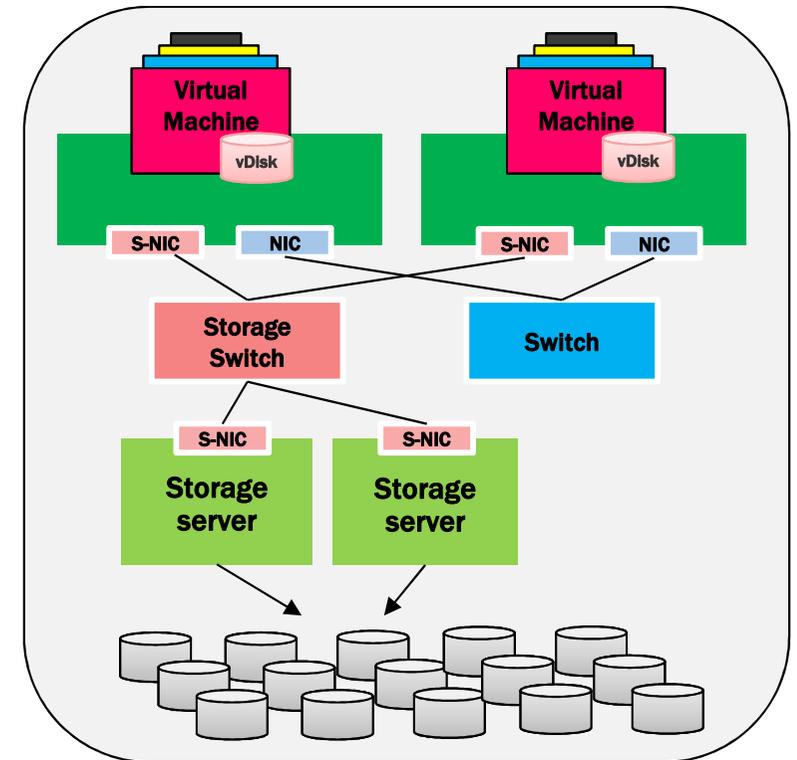




- ▶ **File (NAS)**
 - ▶ **Examples: SMB2 (CIFS) (Windows), NFS**
 - ▶ **Typical operations: open, close, read, write, rewind**
- ▶ **Block (SAN)**
 - ▶ **Examples: SCSI over FC/FCoE/iSCSI/SAS/SATA**
 - ▶ **Typical operations: read/write extent of blocks from/to LUN**
- ▶ **Object**
 - ▶ **Examples: T10 OSD, OpenStack, Amazon S3, SNIA CDMI**
 - ▶ **Typical operations: put, get**
- ▶ **Big Data**
 - ▶ **Examples: HDFS**
 - ▶ **Operations: analysis with Map-Reduce**


Network Attached Storage: NAS




- ▶ A **Network Attached Storage (NAS)** is a storage device that is able to “export” its own filesystem to remote servers through a network file system protocol
- ▶ Example of network file system protocols:
 - ▶ NFS
 - ▶ Server Message Block (SMB or Samba)
- ▶ Remote servers access the NAS resources through the filesystem abstraction
- ▶ Remote directories need to be “mounted” on the servers’ filesystem
- ▶ NAS devices are cheaper than SANs
- ▶ Connection between servers and NAS devices is through Ethernet

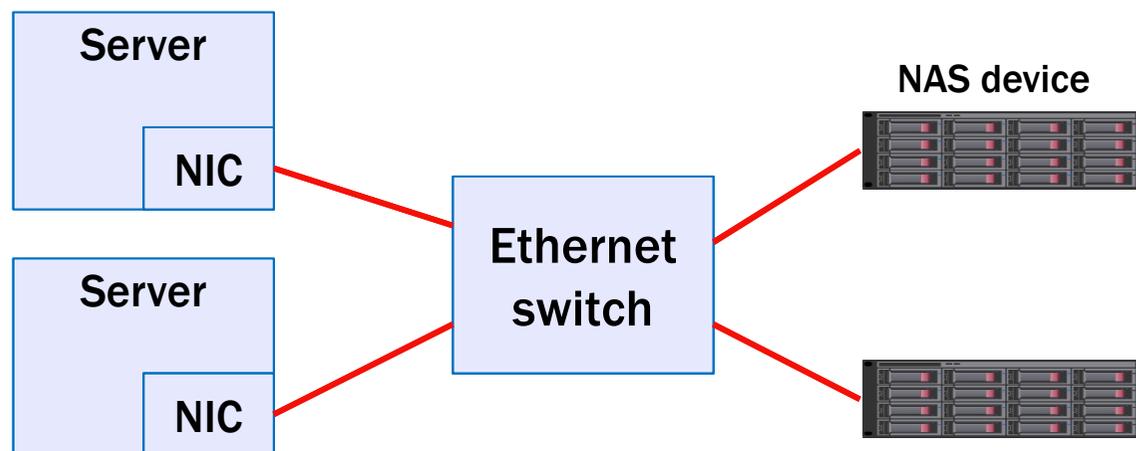

Network File System (NFS)




- ▶ NFS is a POSIX-compliant distributed file system defined as an open standard in RFCs
 - ▶ Works according to the server-client model
 - ▶ NFS builds on the *Remote Procedure Call* (RPC) system
 - ▶ In NFSv3, service listens on random TCP port
 - ▶ NFS use RPC to get the port of service
- ▶ Some features :
 - ▶ Shared POSIX file system
 - ▶ Implemented in Linux kernel

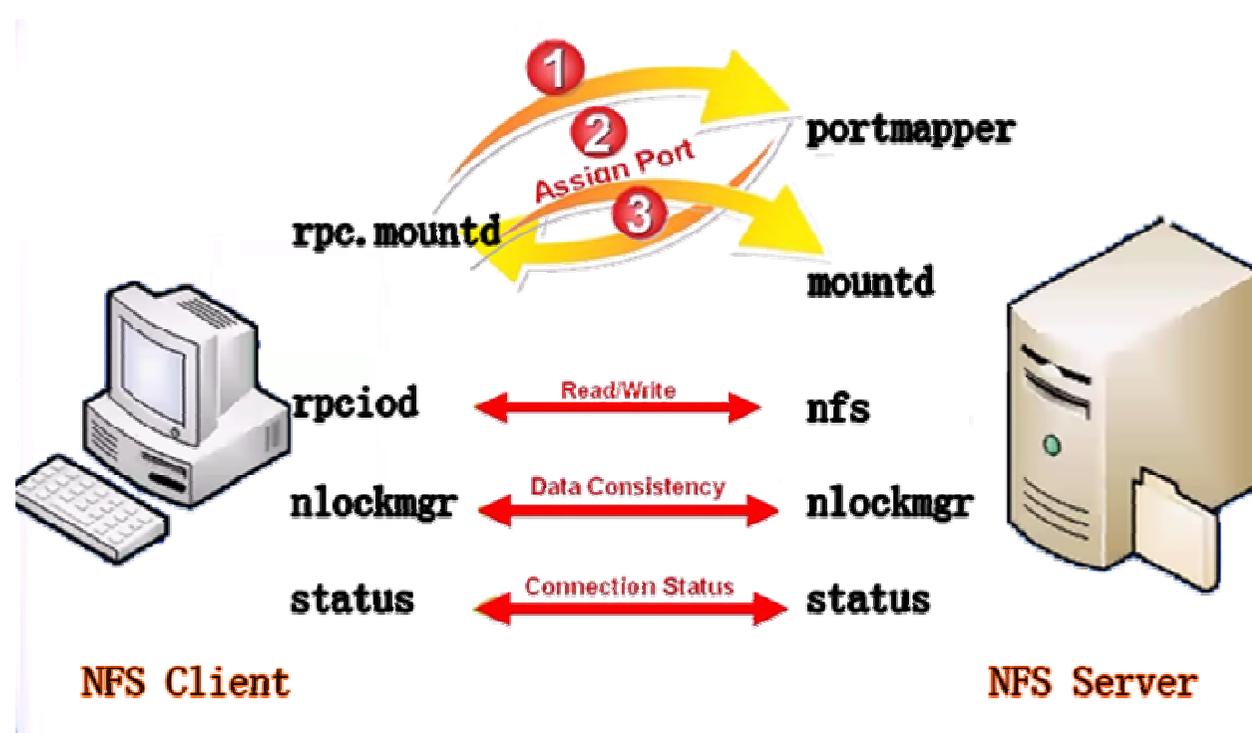

Consistency and concurrency in NFS



- ▶ Lockd offers a write lock to handle concurrent update
- ▶ Statd handles the consistency between server and clients

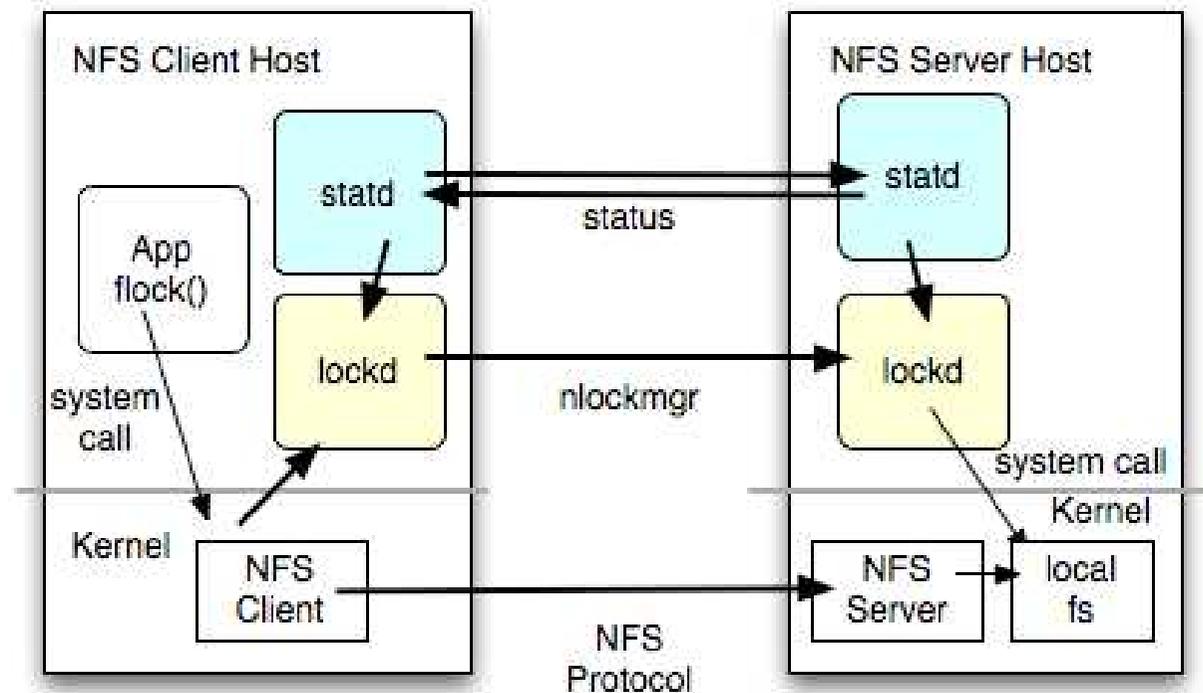

Storage Area Network: SAN





- ▶ A **Storage Area Network (SAN)** is a dedicated network that carries data between computer systems and storage devices
- ▶ A SAN consists of:
 - *a communication infrastructure*, which provides physical connections, and
 - *a management layer*, which organizes the connections, storage elements, and computer systems
- ▶ Differently from NAS, a SAN provides servers with a block storage abstraction
- ▶ A server can attach a remote volume as if it were directly attached
- ▶ A SAN supports centralized storage management
 - ▶ SANs make it possible to move data between various storage devices, share data between multiple servers, and back up and restore data rapidly and efficiently

Fibre Channel architecture




- ▶ Fibre Channel is the reference standard for SANs (*block storage*)
- ▶ Operates over copper and fiber optic cables at distances of up to 10 kilometers
- ▶ Hosts are equipped with special NICs called *Host Bus Adapters* (HBA)
- ▶ Special FC switched are required to interconnect servers with storage devices

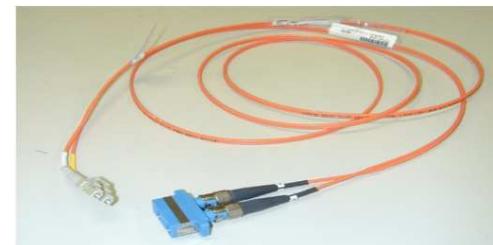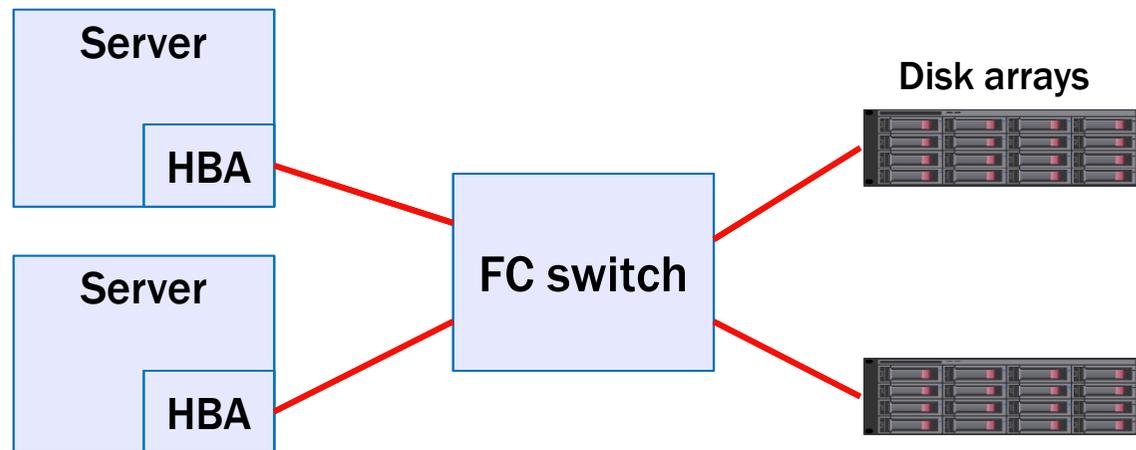

Fibre Channel protocol



- ▶ Fibre Channel is a technology based on a complex layered architecture
- ▶ Switched network protocol
- ▶ 1/2/4/8/16 Gbps + 10 Gbps data rate
- ▶ With FC the delivery of data is guaranteed and there's no loss of data
 - ▶ Credit based link level flow control
- ▶ FC-4 Protocol Mapping for SCSI:
- ▶ defines how to send SCSI information on FC
- ▶ defines Data Information Units
 - ▶ FCP_CMND (unsolicited command)
 - ▶ FCP_XFER_RDY (data descriptor)
 - ▶ FCP_DATA (solicited data)
 - ▶ FCP_RSP (command status)

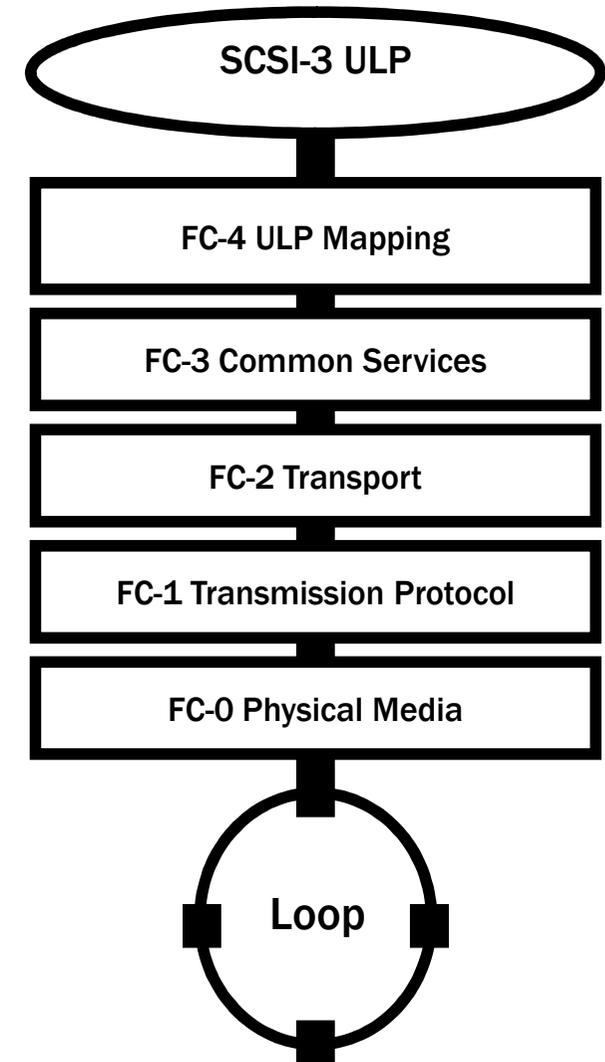

Fibre Channel topologies



▶ Point-to-point




- ▶ A direct connection between two endpoints

▶ Arbitrated loop

- ▶ This is a ring topology that shares the fiber-channel bandwidth among multiple endpoints
- ▶ The loop is implemented within a hub that interconnects the endpoints
- ▶ An arbitrated scheme is used to determine which endpoint gets control of the loop. The maximum number of ports is 127.

▶ Switched fabric

- ▶ Provides the max flexibility and makes the best use of the aggregated bandwidth by the use of switched connections between endpoints
- ▶ One or more switches are interconnected to create a fabric, to which the endpoints are connected

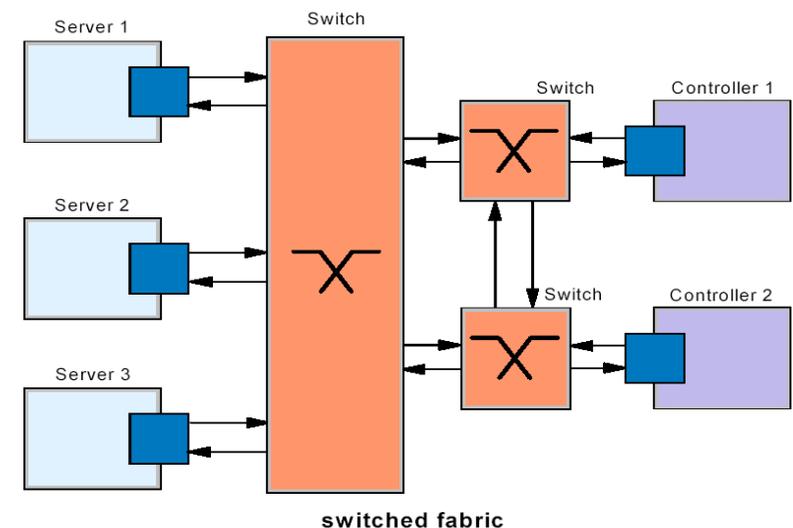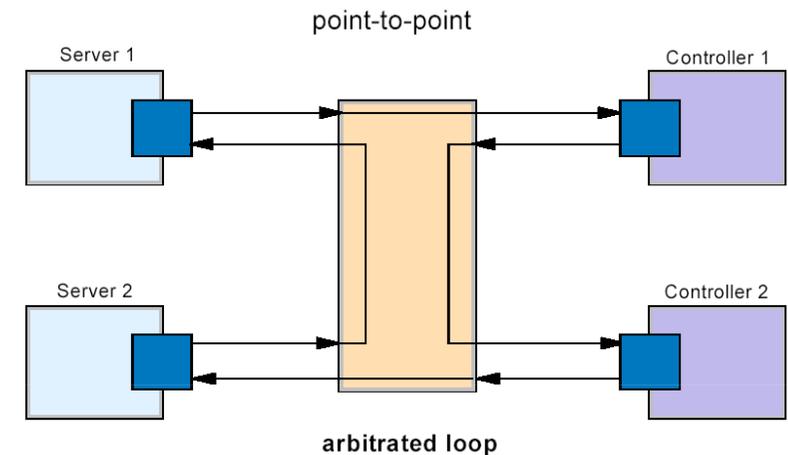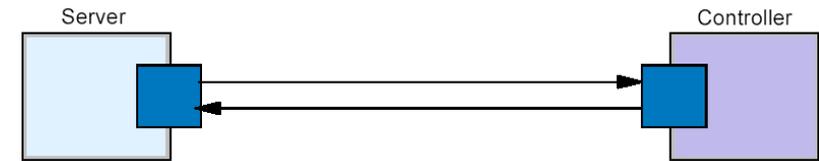



- ▶ Fibre Channel requires its own interconnection systems
- ▶ To decrease costs (to buy dedicated switch fabrics and to deploy a dedicated cabling system) in modern datacenters are recently applied new technologies that allow to connect SAN systems to servers through the an Ethernet infrastructure
 - ▶ This infrastructure may be separated from the Ethernet infrastructure used for server-to-server communication or just be the same
- ▶ Communication requirements for a networked storage system:
 - ▶ Lossless data transfer
 - ▶ Timely delivery

- ▶ **SCSI is a technology used to connect devices to a host**
- ▶ **The endpoint of most SCSI commands is a "logical unit" (LU)**
- ▶ **Examples of logical units include hard drives, tape drives, CD and DVD drives, printers and processors**
- ▶ **An *initiator* creates and sends SCSI commands to the *target***
- ▶ **A *task* is a linked set of *SCSI commands***
 - ▶ **Any SCSI activity is related to a task**
- ▶ **Some LUNs support multiple pending (queued) tasks**
 - ▶ **The target uses a "task tag" to distinguish between tasks**
- ▶ **A SCSI command results in an optional data phase and a response phase**
 - ▶ **In the data phase, information travels either from the initiator to the target, as in a WRITE command, or from target to initiator, as in a READ command**
 - ▶ **In the response phase, the target returns the final status of the operation, including any errors**
 - ▶ **A response terminates a SCSI command**

- ▶ iSCSI directly implements a SAN across a TCP/IP network
- ▶ iSCSI initiator functionality available in most operating systems and hypervisors
- ▶ Communication between initiator and target occurs over one or more TCP connections
- ▶ The TCP connections are used for sending control messages, SCSI commands, parameters and data within iSCSI Protocol Data Units (iSCSI PDU)
- ▶ The group of TCP connections linking an initiator with a target form a *session*
- ▶ iSCSI supports ordered command delivery within a session
- ▶ All commands (initiator-to-target) and responses (target-to-initiator) numbered
- ▶ The targets listen on a well-known TCP port for incoming connections
- ▶ The initiator begins the login process by connecting to that well-known TCP port
- ▶ As part of the login process, the initiator and target MAY wish to authenticate each other
- ▶ Once suitable authentication has occurred, the target MAY authorize the initiator to send SCSI commands

Fibre Channel over Ethernet (FCoE)



- ▶ FCoE is a standard (T11 FC-BB-5) that allows to transmit FC messages as a L3 protocol encapsulated in Ethernet frames (with type=0x8906)
- ▶ FC frames usually carry SCSI commands
- ▶ FCoE requires specific Ethernet extensions to be implemented
 - ▶ Lossless switches and fabrics (e.g. supporting IEEE 802.3 PAUSE)
 - ▶ Jumbo frames support strongly recommended
- ▶ Traditional FC storage devices can be connected to the Ethernet infrastructure through a switching device called *Fibre Channel Forwarder* (FCF)
- ▶ FCFs act as bridges towards traditional FC SAN devices, encapsulating and decapsulating FC frames

