

Corso di Laurea in Ingegneria Informatica



Corso di Reti di Calcolatori I

Roberto Canonico (roberto.canonico@unina.it)

Giorgio Ventre (giorgio.ventre@unina.it)

Virtual LAN: VLAN

I lucidi presentati al corso sono uno strumento didattico
che **NON** sostituisce i testi indicati nel programma del corso
I lucidi sono adattati dagli originali di J. Kurose e K. Ross e fanno riferimento al testo
Reti di calcolatori e Internet - Un approccio top-down (4a ed.)

Nota di copyright per le slide COMICS



Nota di Copyright

Questo insieme di trasparenze è stato ideato e realizzato dai ricercatori del Gruppo di Ricerca COMICS del Dipartimento di Informatica e Sistemistica dell'Università di Napoli Federico II. Esse possono essere impiegate liberamente per fini didattici esclusivamente senza fini di lucro, a meno di un esplicito consenso scritto degli Autori. Nell'uso dovranno essere esplicitamente riportati la fonte e gli Autori. Gli Autori non sono responsabili per eventuali imprecisioni contenute in tali trasparenze né per eventuali problemi, danni o malfunzionamenti derivanti dal loro uso o applicazione.

Autori:

Simon Pietro Romano, Antonio Pescapè, Stefano Avallone,
Marcello Esposito, Roberto Canonico, Giorgio Ventre





VLAN

- **Problema:** far coesistere sulla stessa infrastruttura di rete fisica due o più reti IP distinte
- Gli switch possono gestire gruppi di porte in modo che gli host connessi a ciascun gruppo costituiscano una **rete Ethernet virtuale** separata dalle altre (VLAN)




VLAN introduction

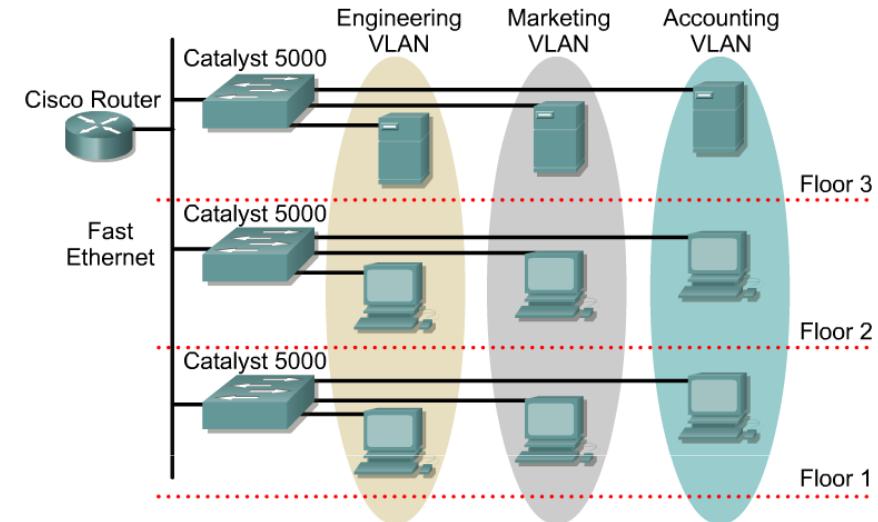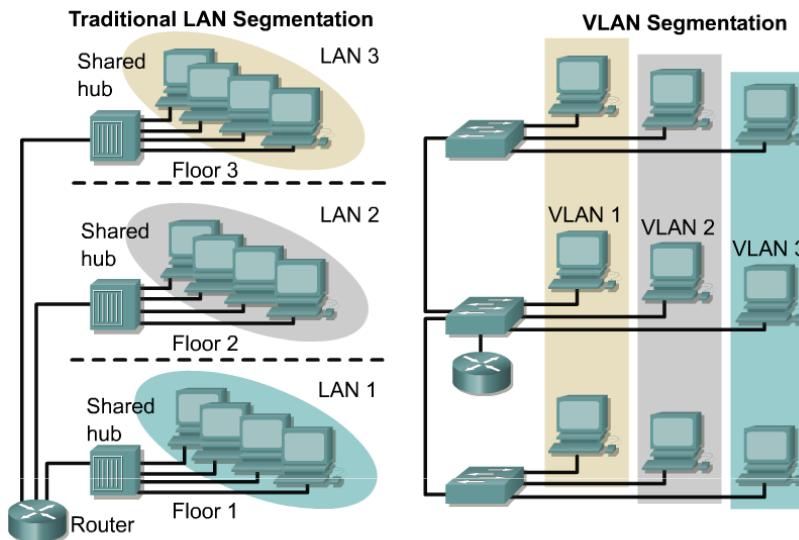

- **VLANs provide segmentation based on broadcast domains**
- VLANs logically segment switched networks based on the project teams, or applications of the organization regardless of the physical location or connections to the network
- All workstations and servers used by a particular workgroup share the same VLAN, regardless of the physical connection or location




VLAN introduction (2)

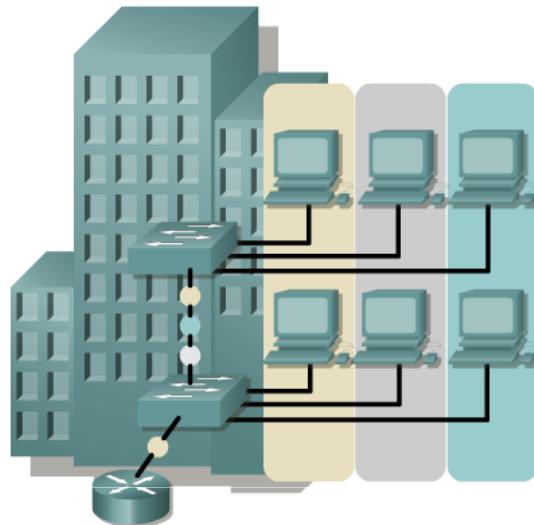

- A group of ports or users in same broadcast domain
- Can be based on port ID, MAC address, protocol, or application
- LAN switches and network management software provide a mechanism to create VLANs
- Frame tagged with VLAN ID


- VLANs are created to provide segmentation services traditionally provided by physical routers in LAN configurations
- VLANs address scalability, security, and network management. Routers in VLAN topologies provide broadcast filtering, security, and traffic flow management
- Switches may not bridge any traffic between VLANs, as this would violate the integrity of the VLAN broadcast domain
- **Traffic should only be routed between VLANs**

Broadcast domains with VLANs and routers

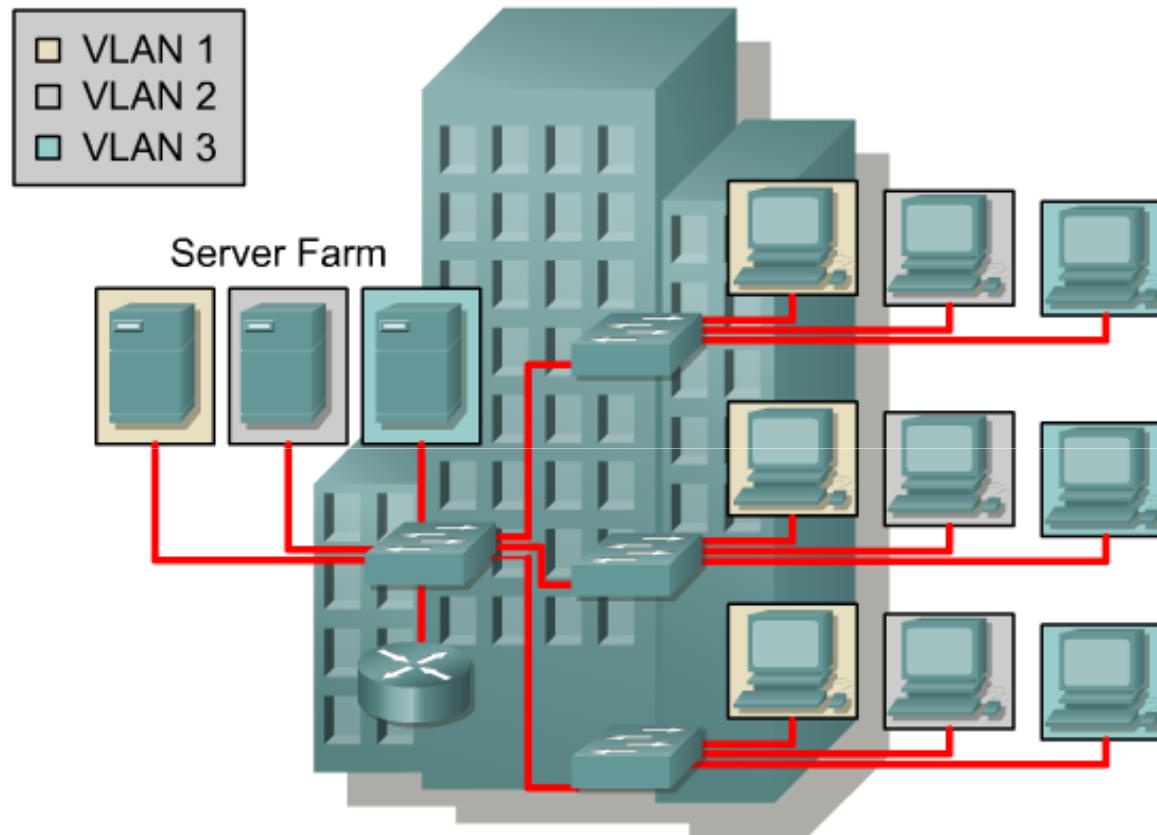


- A VLAN is a broadcast domain created by one or more switches
- The network design above creates three separate broadcast domains

Broadcast domains with VLANs and routers

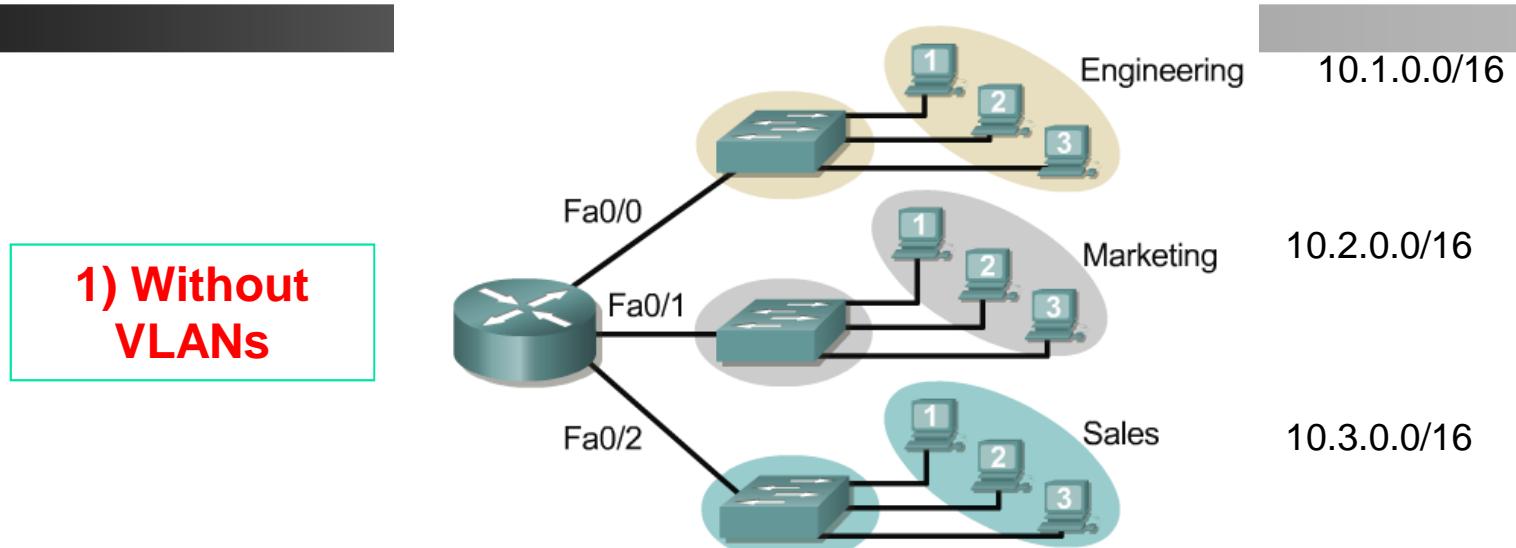


- 1) **Without VLANs**, each group is on a different IP network and on a different switch.
 - 2) **Using VLANs**: Switch is configured with the ports on the appropriate VLAN. Still, each group on a different IP network; however, They are all on the same switch.
- What are the broadcast domains in each?

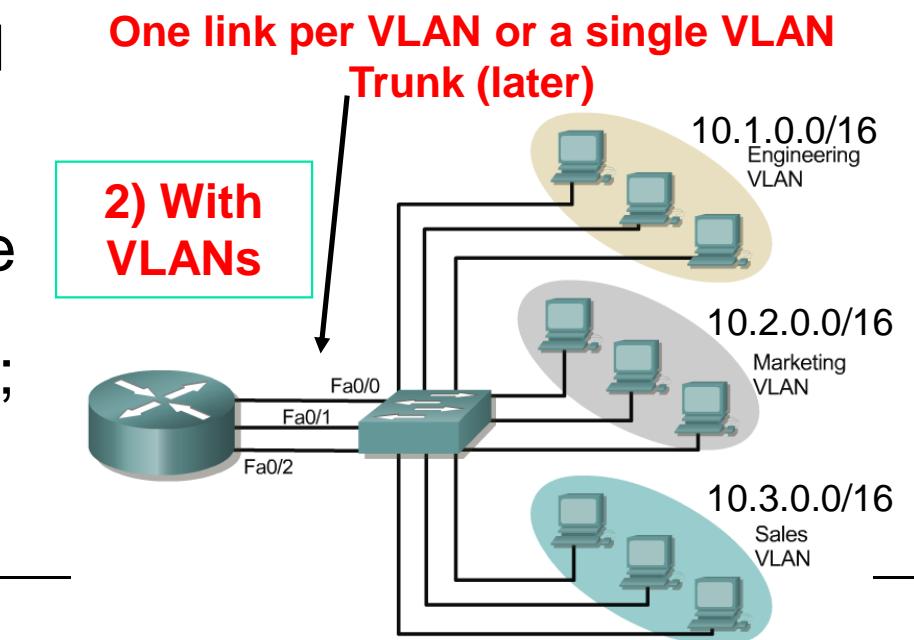



Without VLANs – No Broadcast Control

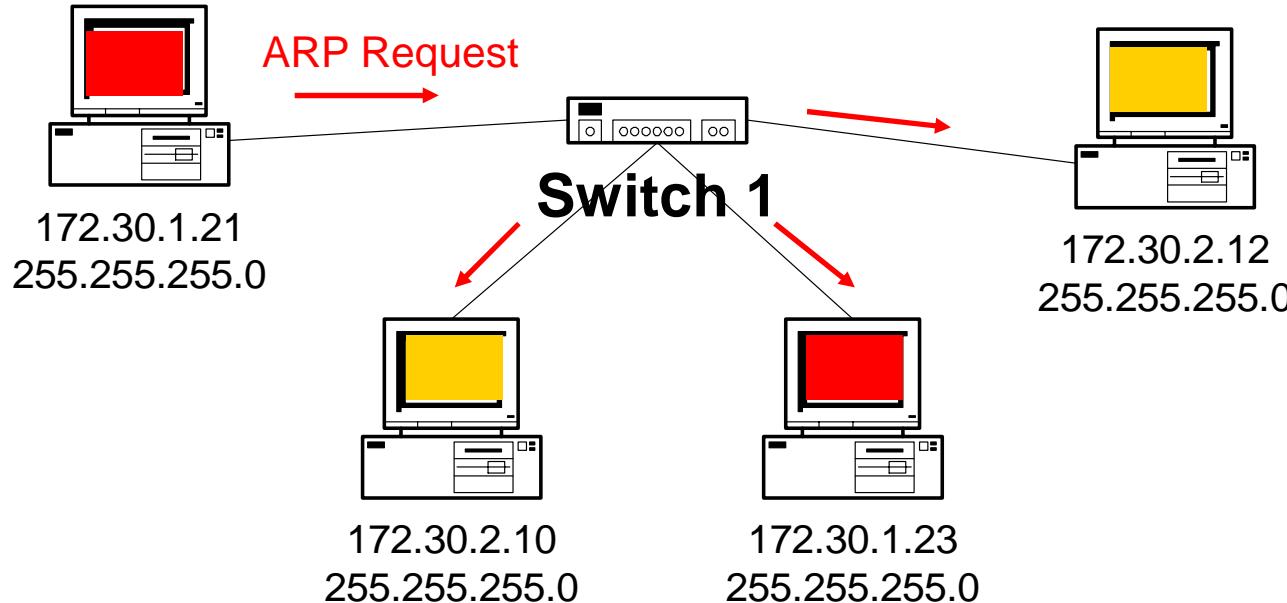


No VLANs

- Same as a single VLAN
 - Two Subnets
- Without VLANs, the ARP Request would be seen by all hosts
 - Consuming unnecessary network bandwidth and host processing cycles




With VLANs – Broadcast Control

Switch Port: VLAN ID

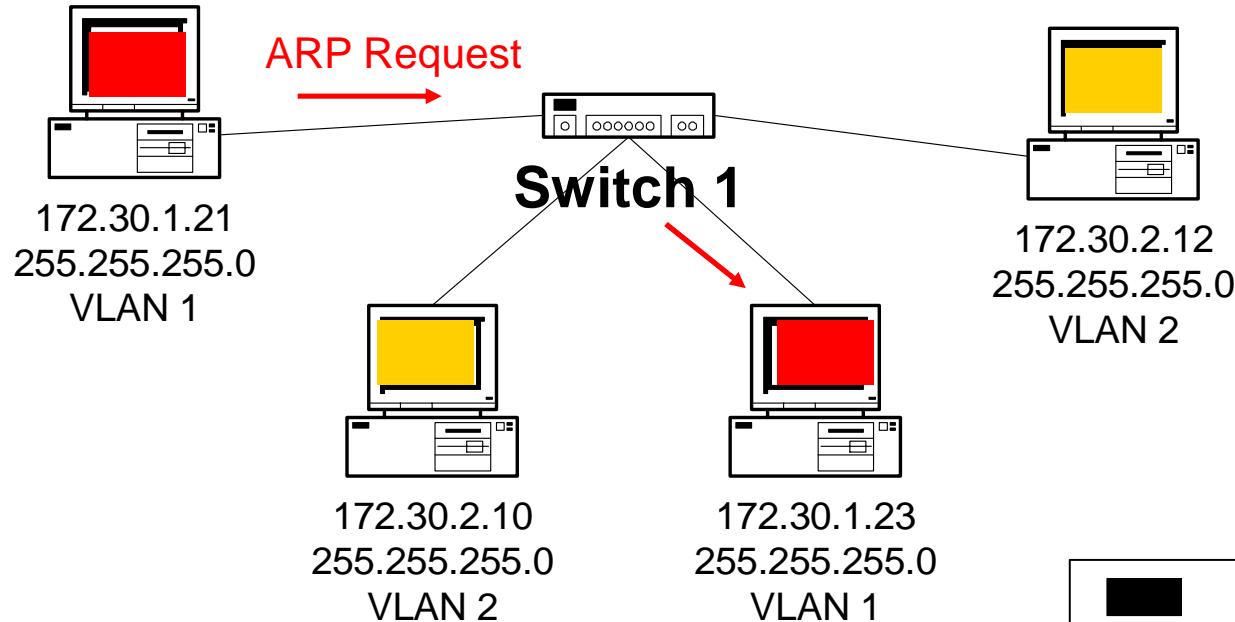



Two VLANs

- Two Subnets

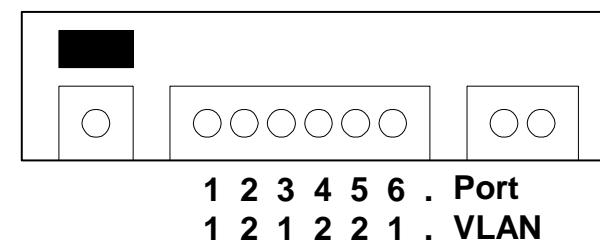



VLAN operation

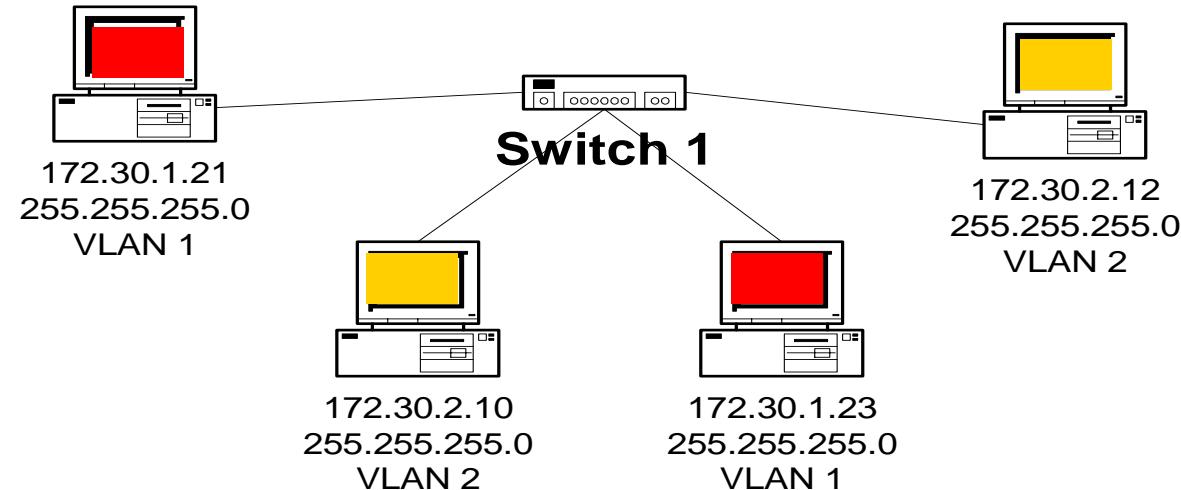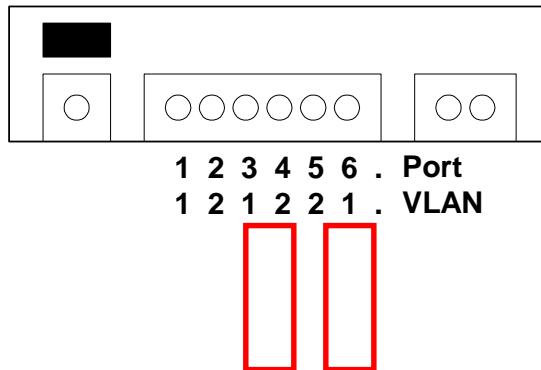

Important notes on VLANs:

- VLANs are assigned on the switch port
There is no “VLAN” assignment done on the host (usually)
- In order for a host to be a part of that VLAN, it must be assigned an IP address that belongs to the proper subnet. Remember: VLAN = Subnet
- Assigning a host to the correct VLAN is a 2-step process:
 1. Connect the host to the correct port on the switch
 2. Assign to the host the correct IP address depending on the VLAN membership

Two VLANs

- Two Subnets




VLAN operation

Configuring VLANs	Description
Statically	<p>Network administrators configure port-by-port.</p> <p>Each Port is associated with a specific VLAN.</p> <p>The network administrator is responsible for keying in the mappings between the ports and VLANs.</p>
Dynamically	<p>The ports are able to dynamically work out their VLAN configuration.</p> <p>Uses a software database of MAC address to VLAN mappings (which the network administrator must set up first).</p>

- Each switch port can be assigned to a different VLAN
- Ports assigned to the same VLAN share broadcasts
- Ports that do not belong to that VLAN do not share these broadcasts




VLAN operation

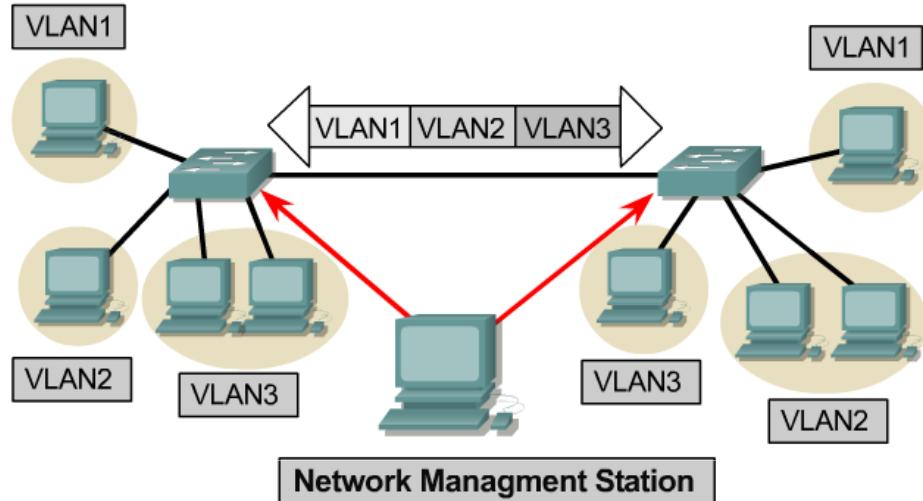

- **Static membership VLANs are called port-based VLANs**
- As a device enters the network, it automatically assumes the VLAN membership of the port to which it is attached
- The **default VLAN** for every port in the switch is the management VLAN (VLAN1) and may not be deleted
- All other ports on the switch may be reassigned to alternate VLANs



VLAN operation

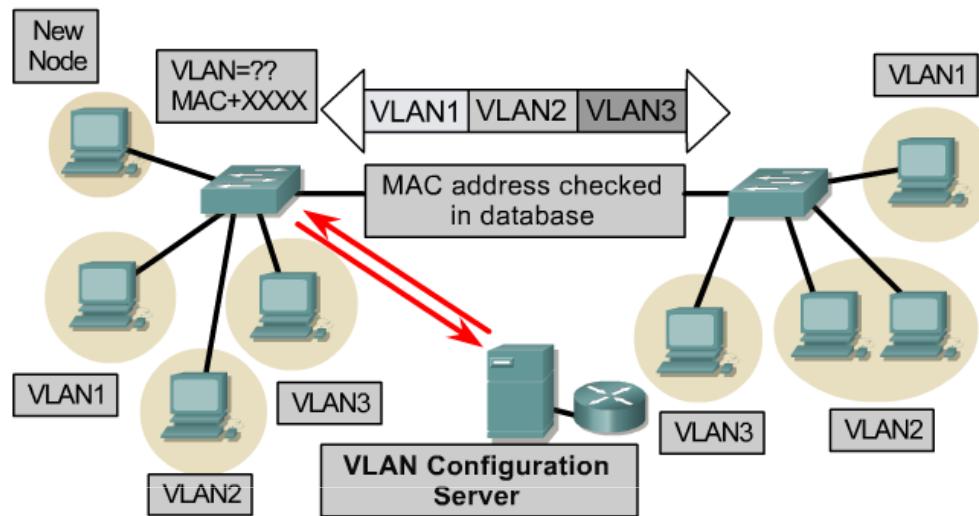


- Dynamic membership VLANs are created through network management software
 - Not as common as static VLANs
- Dynamic VLANs allow for membership based on the MAC address of the device connected to the switch port
- As a device enters the network, it queries a database within the switch for a VLAN membership



Benefits of VLANs

All users attached to the same switch port must be in the same VLAN.

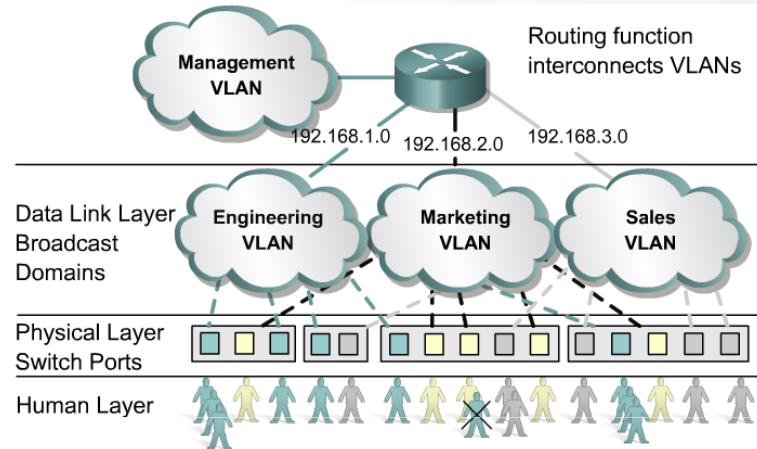


If a hub is connected to VLAN port on a switch, all devices on that hub must belong to the same VLAN

- The key benefit of VLANs is that they permit the network administrator to organize the LAN logically instead of physically
- This means that an administrator is able to do all of the following:
 - Easily move workstations on the LAN
 - Easily add workstations to the LAN
 - Easily change the LAN configuration
 - Easily control network traffic
 - Improve security

VLAN Types



Approaches Can Vary Performance

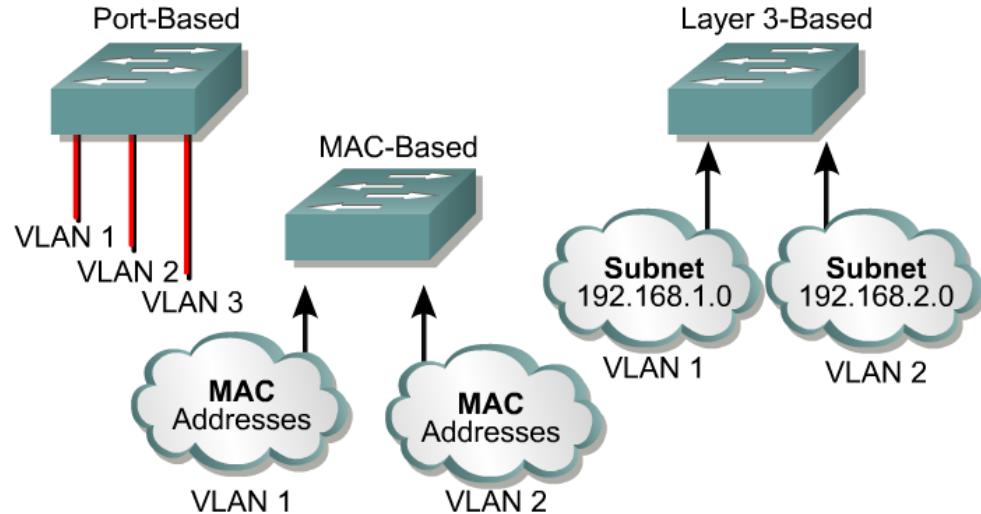


VLAN Types	Description
Port-based	<ul style="list-style-type: none">Most common configuration method.Ports assigned individually, in groups, in rows, or across 2 or more switches.Simple to use.Often implemented where Dynamic Host Control Protocol (DHCP) is used to assign IP addresses to network hosts.
MAC address	<ul style="list-style-type: none">Rarely implemented today.Each address must be entered into the switch and configured individually.Users find it useful.Difficult to administer, troubleshoot and manage.
Protocol Based	<ul style="list-style-type: none">Configured like MAC addresses, but instead uses a logical or IP address.No longer common because of DHCP.



VLAN operation


- ◆ In port-based or port-centric VLAN membership, the port is assigned to a specific VLAN membership independent of the user or system attached to the port.

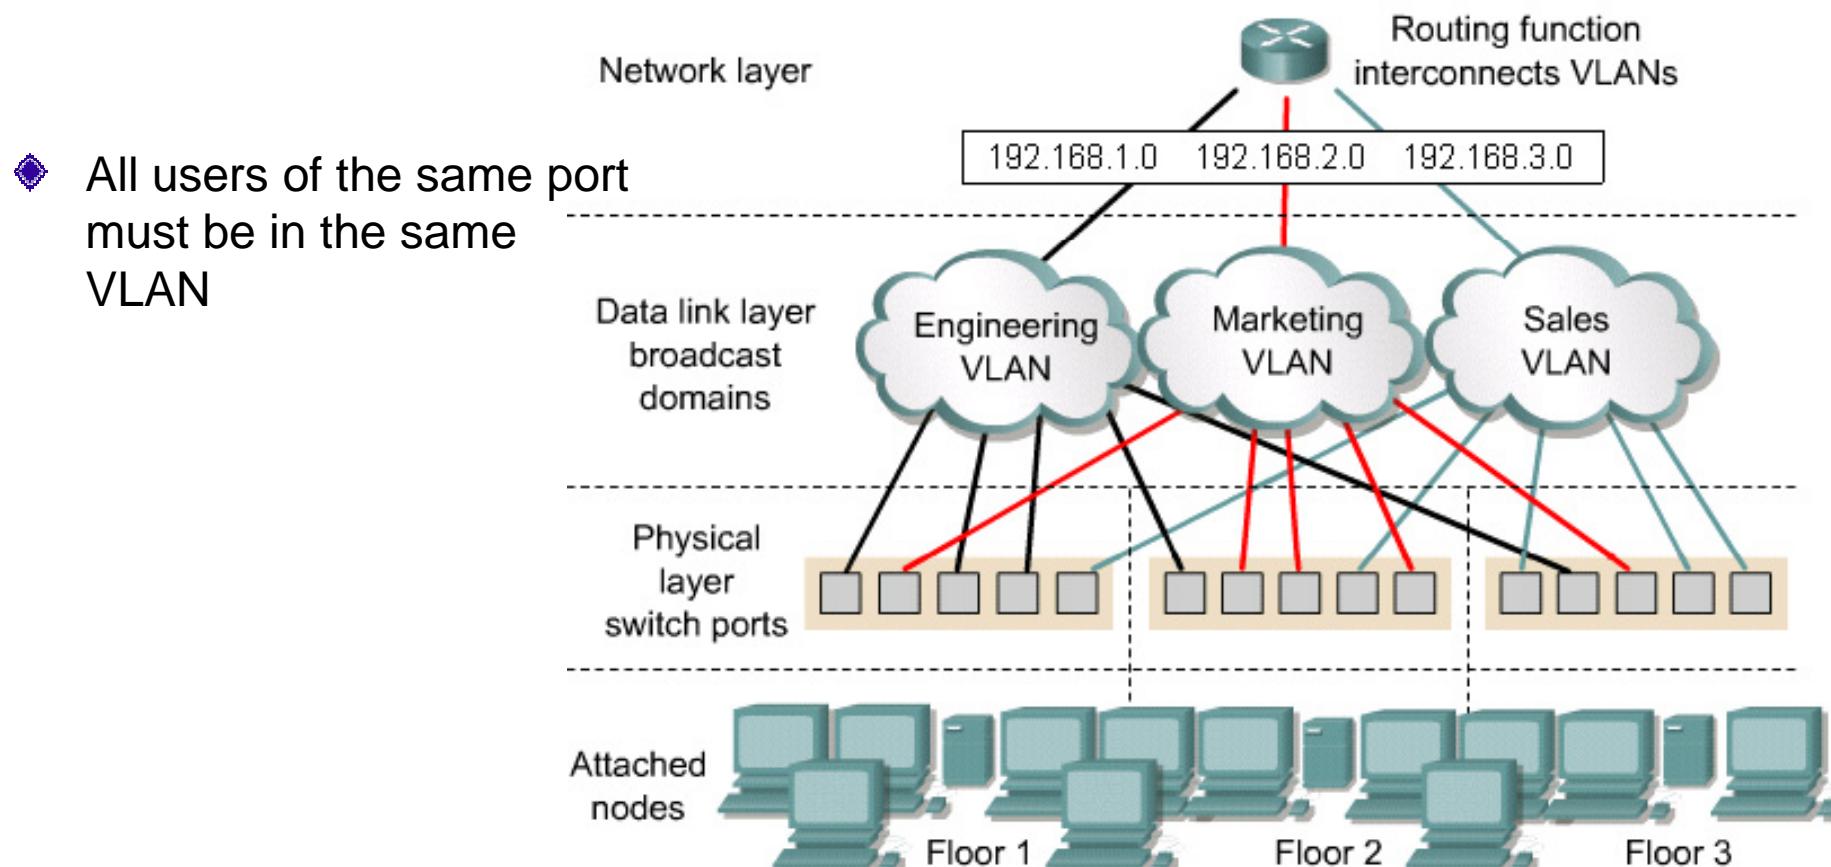



Membership by Port

Maximizes Forwarding Performance

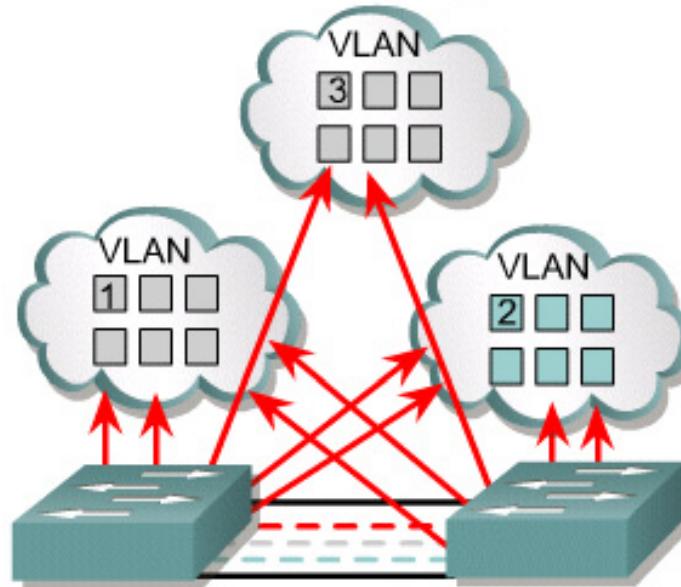


- User assigned by port association
- Requires no lookup if done in ASICs
- Easily administered via GUIs
- Maximizes security between VLANs
- Packets do not "leak" into other domains
- Easily controlled across network



Membership by MAC-Addresses

Requires Filtering, Impacts Performance

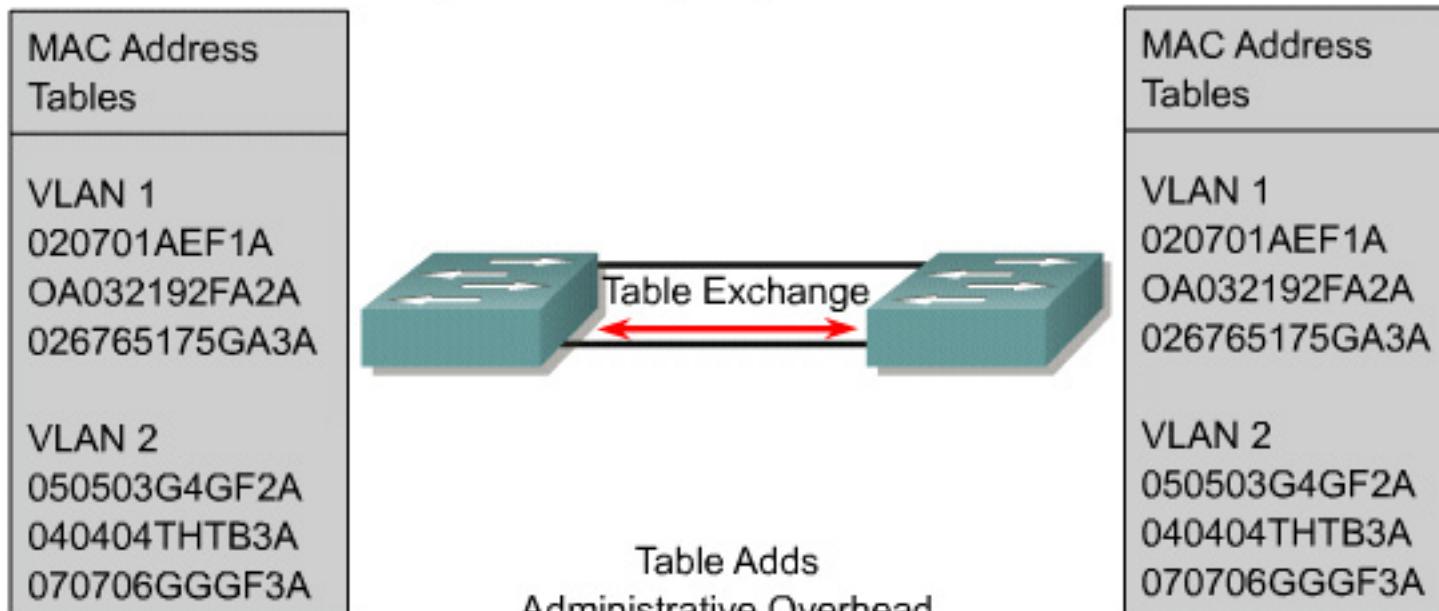


- User assigned based on MAC addresses
- Offers flexibility, yet adds overhead
- Impacts performance, scalability, and administration
- Offers similar process for higher layers



Comunicazione con VLAN


- Nella configurazione di VLAN rappresentata in figura, Gianni può inviare frame soltanto a Giulia

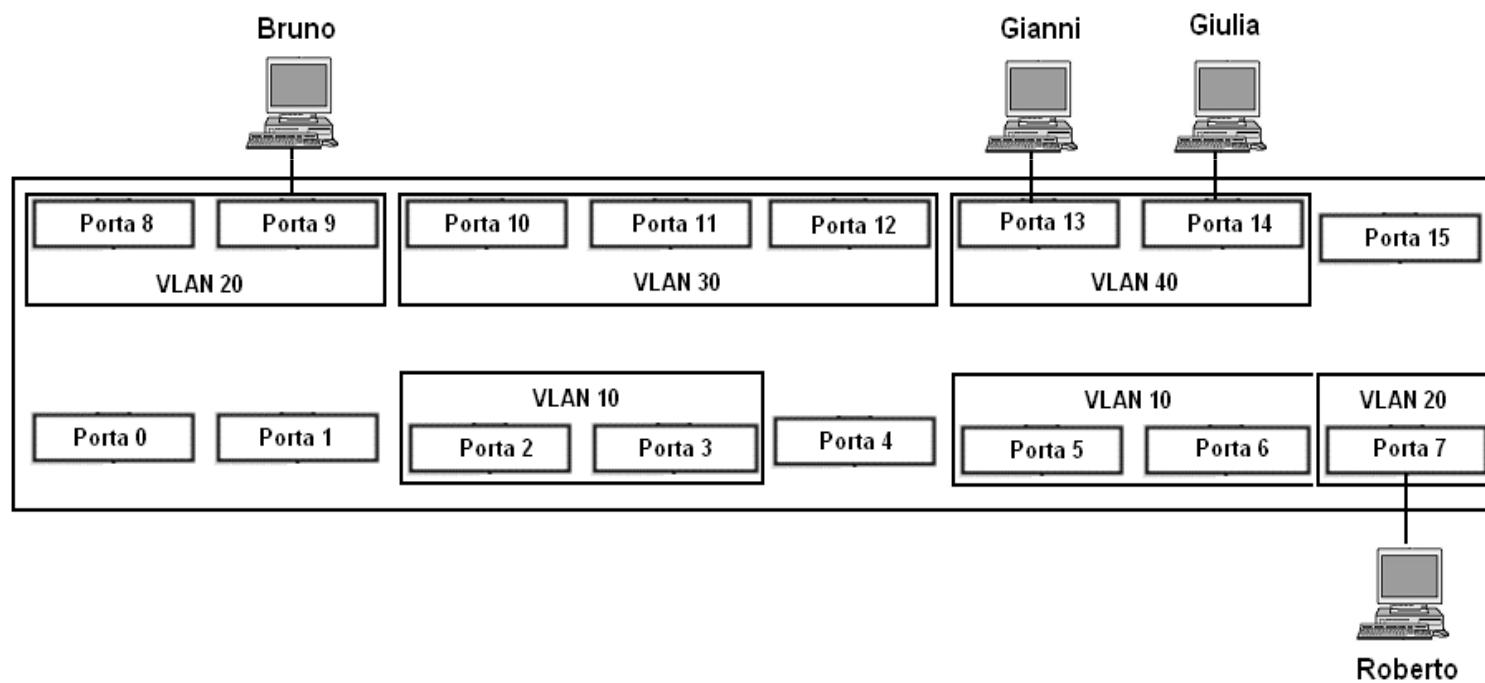



Comunicazione tra VLAN diverse


- Per fare comunicare VLAN diverse occorre creare un ponte attraverso un dispositivo apposito
 - bridge se opera a livello Ethernet (L2)
 - router se opera a livello rete (L3)

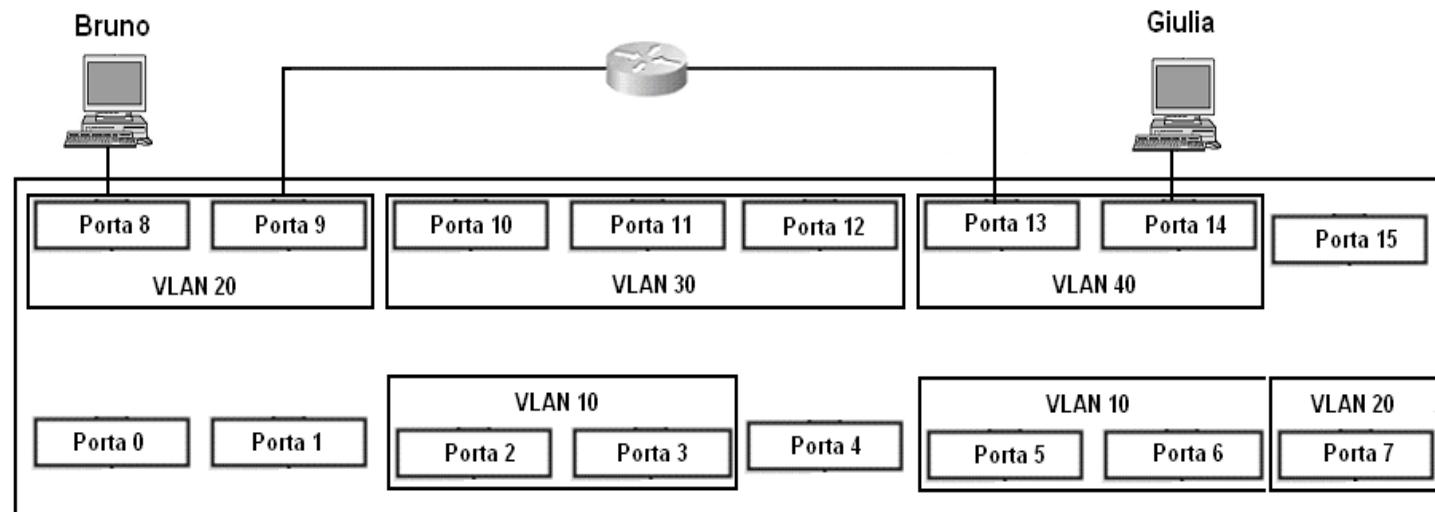



Switch/router


- Molti produttori offrono dispositivi in grado di svolgere contemporaneamente le funzioni di switch a livello Ethernet e di router a livello 3
- Questi dispositivi creano la connessione tra VLAN a livello 3

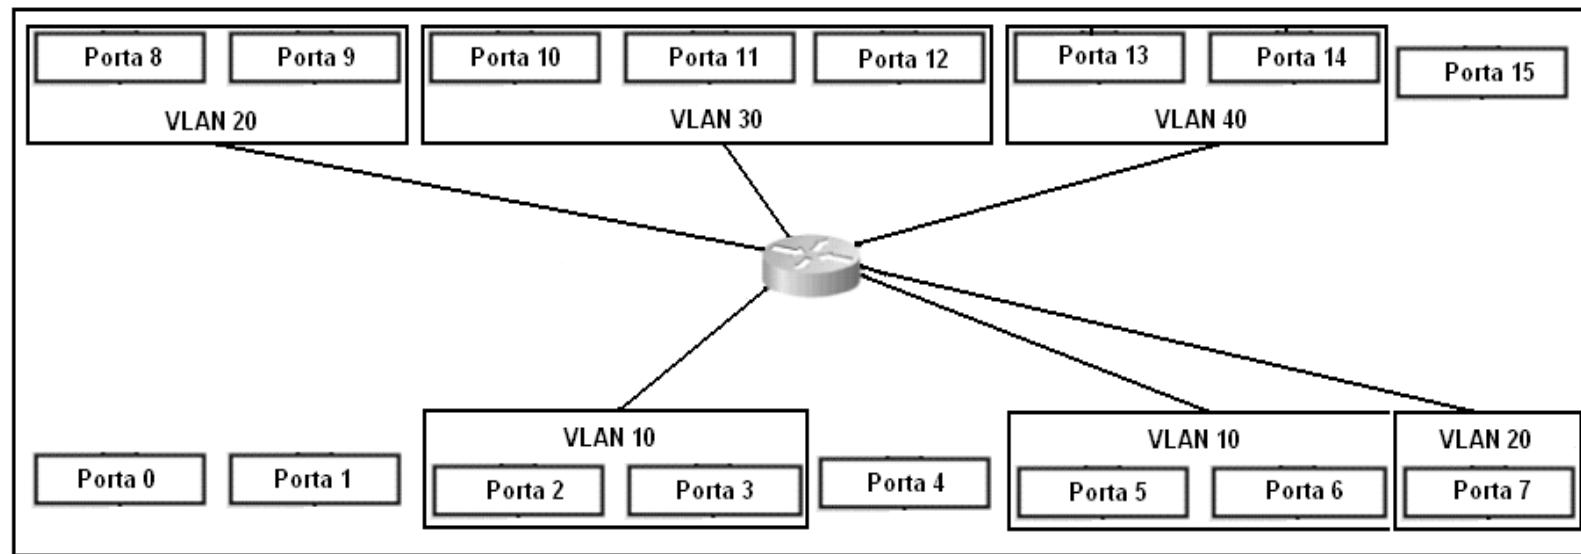



Connessione a livelli superiori (1)


- In linea di principio, si potrebbe ottenere lo stesso risultato collegando le interfacce di un router a tutte le coppie di VLAN

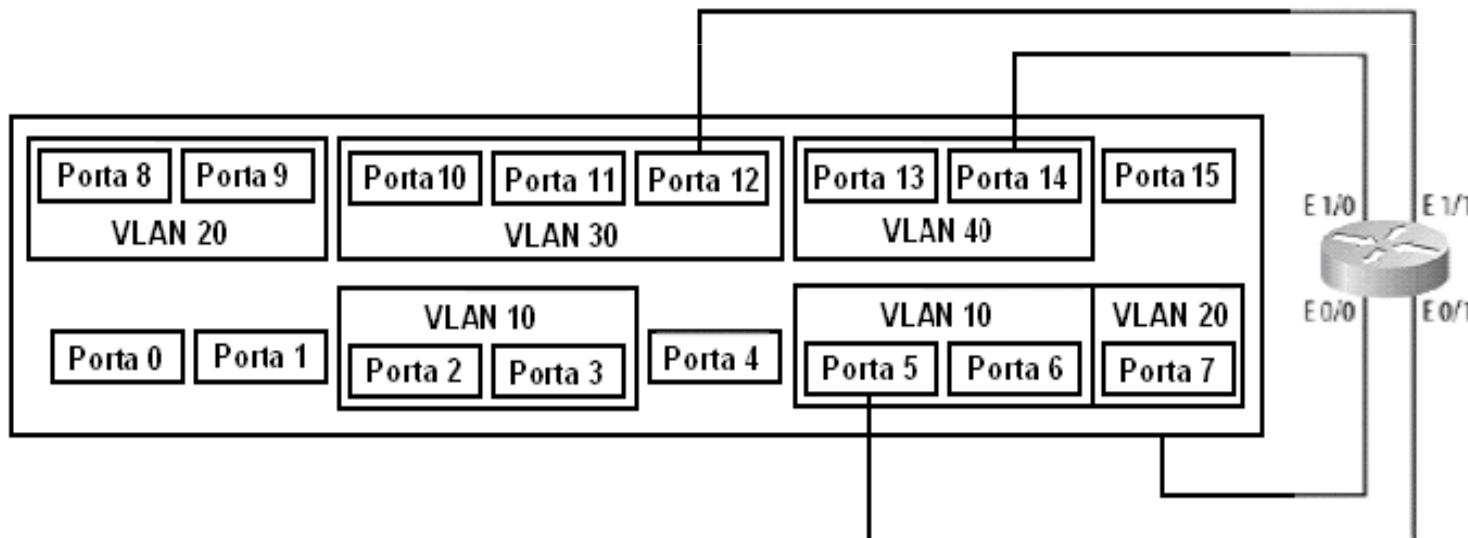



VLAN Trunking (1)


- La presenza delle VLAN crea un problema nella connessione tra due o più switch
 - Se collego la porta di uno switch a una porta di un altro switch, la connessione riguarderà solo le VLAN che comprendono le due porte utilizzate
 - Occorrerebbero quindi tanti collegamenti quante sono le VLAN da collegare

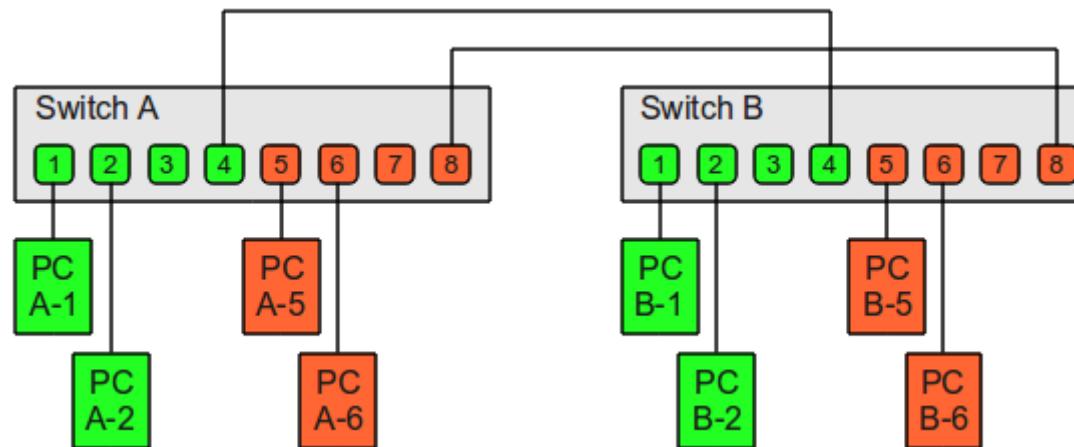



VLAN trunking (2)

- Il trunking abilita la connessione tra le VLAN di switch diversi
 - Perché lo switch di destinazione sappia a quale VLAN inoltrare i frame in arrivo su una porta di trunking, occorre *taggare* (contrassegnare) i frame con l'identificativo della VLAN di destinazione
 - Questo non è previsto dal protocollo Ethernet originale

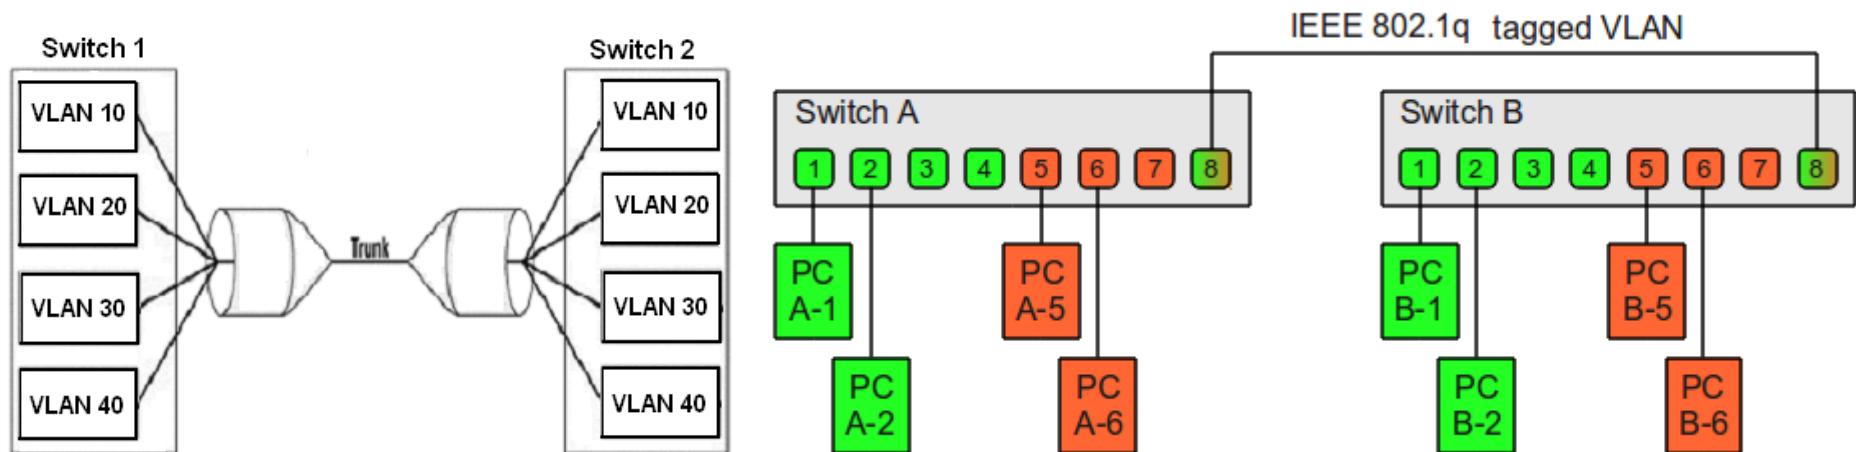




VLAN Tagging

- **VLAN Tagging is used when a link needs to carry traffic for more than one VLAN**
 - **Trunk link:** As packets are received by the switch from any attached end-station device, a unique packet identifier is added within each header.
- **This header information designates the VLAN membership of each packet**
- The packet is then forwarded to the appropriate switches or routers based on the VLAN identifier and MAC address
- Upon reaching the destination node (Switch) the VLAN ID is removed from the packet by the adjacent switch and forwarded to the attached device
- Packet tagging provides a mechanism for controlling the flow of broadcasts and applications while not interfering with the network and applications
- This is known as a trunk link or VLAN trunking




VLAN Tagging

No VLAN Tagging

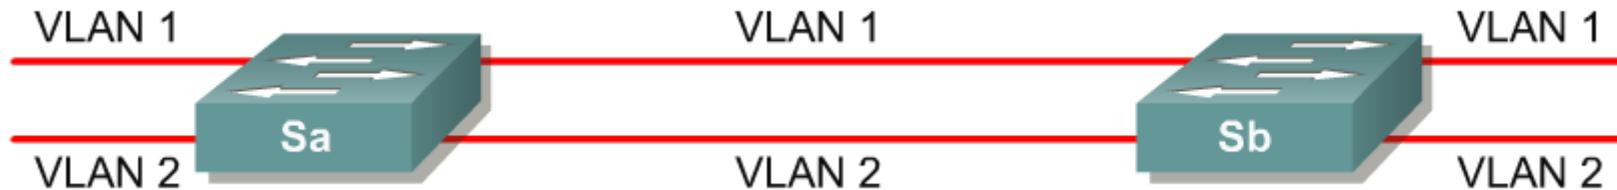

VLAN Tagging

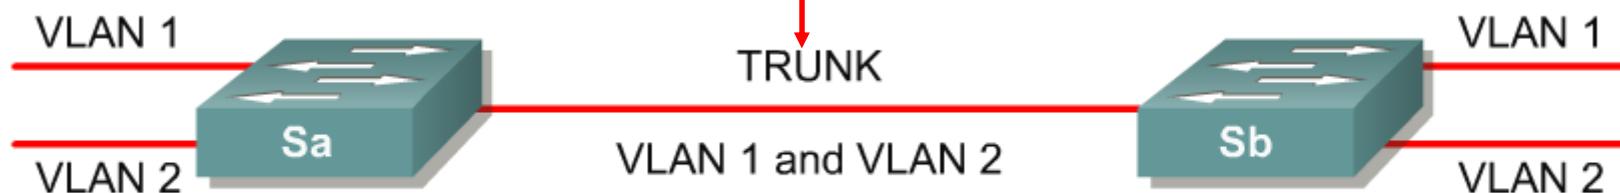


- VLAN Tagging is used when a single link needs to carry traffic for more than one VLAN



Protocolli di trunking (1)

- **Protocolli a encapsulamento**

- Viene aggiunto uno header al frame Ethernet per indicare la VLAN di destinazione
- Es. Cisco Inter-Switch Link (ISL)

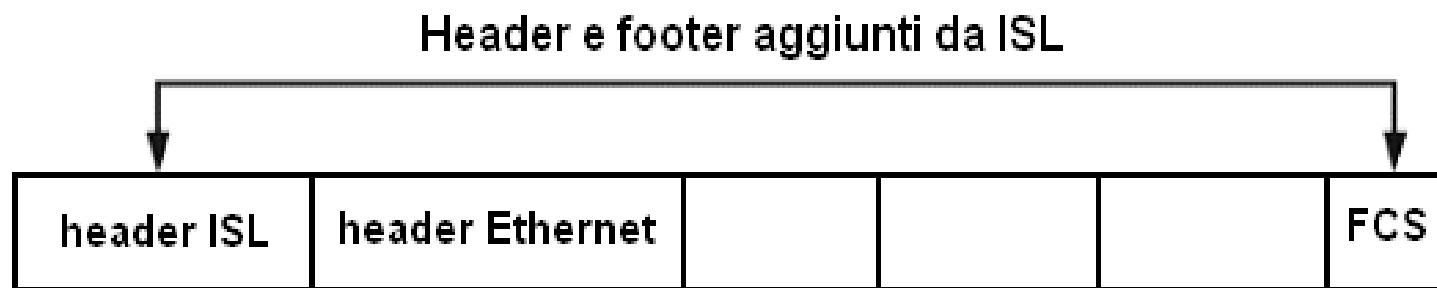



Protocolli di trunking (2)

- Protocolli a piggyback (IEEE 802.1Q)
 - L'identificativo della VLAN (12 bit) è parte di un campo da 4 byte inserito nel frame Ethernet tra i campi indirizzo sorgente e tipo
 - Occorre ricalcolare il CRC all'ingresso e all'uscita dal trunk

