

# Cloud and Datacenter Networking

Università degli Studi di Napoli Federico II

Dipartimento di Ingegneria Elettrica e delle Tecnologie dell'Informazione DIETI

Laurea Magistrale in Ingegneria Informatica

Prof. Roberto Canonico

## Software Defined Networking



- ▶ **Software Defined Networks (SDN)**
- ▶ **Credits for the material:**
  - ▶ **Jennifer Rexford**
  - ▶ **Nick McKeown**
  - ▶ **Scott Shenker**

# The Internet: A Remarkable Story




- ▶ Tremendous success
  - ▶ From research experiment to global infrastructure
- ▶ Brilliance of under-specifying
  - ▶ Network: best-effort packet delivery
  - ▶ Hosts: arbitrary applications
- ▶ Enables innovation in applications
  - ▶ Web, P2P, VoIP, social networks, virtual worlds
- ▶ But, change is easy only at the edge... ☹️



# Inside the network: a different story...



- ▶ Closed equipment
  - ▶ Software bundled with hardware
  - ▶ Vendor-specific interfaces
- ▶ Over specified
  - ▶ Slow protocol standardization
- ▶ Few people can innovate
  - ▶ Equipment vendors write the code
  - ▶ Long delays to introduce new features

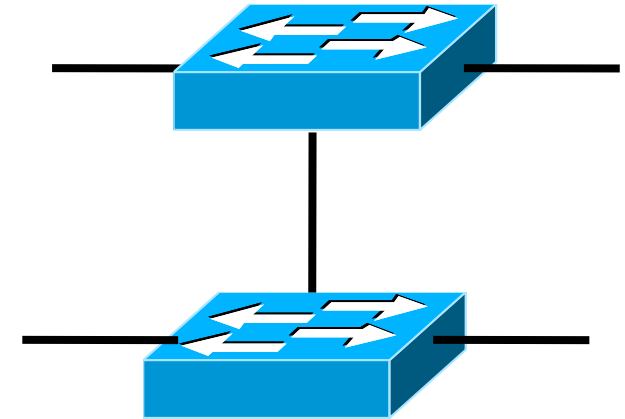


**Impacts performance, security, reliability, cost...**

# Networks are Hard to Manage



- ▶ Operating a network is expensive
  - ▶ More than half the cost of a network
  - ▶ Yet, operator error causes most outages
- ▶ Buggy software in the equipment
  - ▶ Routers with 20+ million lines of code
  - ▶ Cascading failures, vulnerabilities, etc.
- ▶ The network is “in the way”
  - ▶ Especially a problem in data centers with large numbers of VMs




- ▶ Each networking device operates at three different planes
- ▶ **Data Plane:** responsible of processing and forwarding of packets
  - ▶ Based on state in routers and endpoints
  - ▶ E.g., IP, TCP, Ethernet, etc.
  - ▶ Fast timescales (per-packet)
- ▶ **Control Plane:** decision – responsible of establishing the state in routers
  - ▶ Determines how and where packets are forwarded
  - ▶ Routing, traffic engineering, firewall state, ...
  - ▶ Slow time-scales (per control event)
- ▶ **Management plane:** configuration – responsible of general device behavior
  - ▶ Determines how the control plane should be configured
  - ▶ Slow time-scales (manual configuration by network administrators)

# Traditional networking: a router's view



- ▶ In an IP router, the control plane role is played by dynamic routing protocols and the associated state
  - ▶ E.g. OSPF and the Link State Database

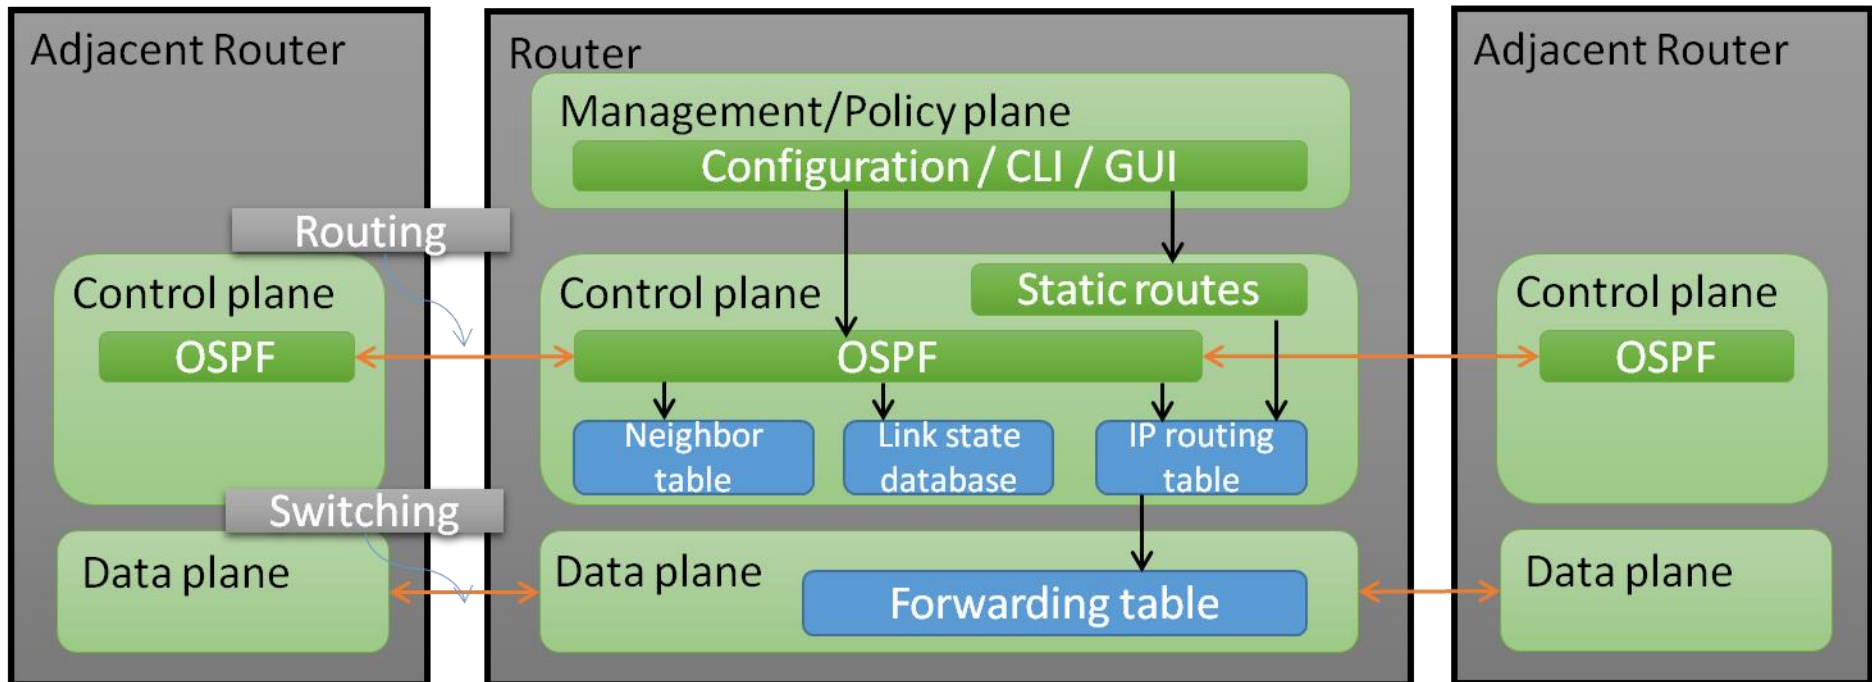

# Tradional planes and time scales



|             | Data                                                                                                                                                        | Control                                                                                                                                             | Management                 |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Time scales | Packets                                                                                                                                                     | Events                                                                                                                                              | Humans                     |
| Task        | Forwarding/<br>buffering/<br>filtering/<br>scheduling                                                                                                       | Routing,<br>circuit set-up                                                                                                                          | Analysis,<br>configuration |
| Location    | Hardware <ul style="list-style-type: none"><li>• Specialized hardware</li><li>• Processes at line rate</li><li>• Every packet</li><li>• Very fast</li></ul> | Router software <ul style="list-style-type: none"><li>• Uses CPU</li><li>• Can only process a small number of packets</li><li>• Very slow</li></ul> | Human or perl scripts      |

- ▶ Separate control plane and data plane entities
  - ▶ Network intelligence and state are **logically centralized**
  - ▶ The underlying network infrastructure is **abstracted** from the applications
- ▶ Remotely control network devices from a central entity
- ▶ Execute or run control plane software on general purpose hardware
  - ▶ Decouple from specific networking hardware
  - ▶ Use commodity servers
- ▶ An architecture to control
  - ▶ not just a networking device ...
  - ▶ but an entire network
- ▶ Expected advantages:
  - ▶ Ability to innovate through software
    - ▶ Overcome the “Internet ossification problem”
  - ▶ Cost reductions through increased competition, hardware commoditization and open-source software

# Software Defined Networking (SDN)



## Control Plane

**Controller**

**Logically-centralized Controller**  
*Smart*

**API to the data plane**  
(e.g., OpenFlow)


**Separated**

## Data Plane

**Switches**  
*Dumb & fast*

- A logically centralized “Controller” uses an open protocol (e.g. OpenFlow) to:
  - Get state information **from** forwarding elements (i.e. switches)
  - Give controls and directives **to** forwarding elements

# SDN: controller programmability

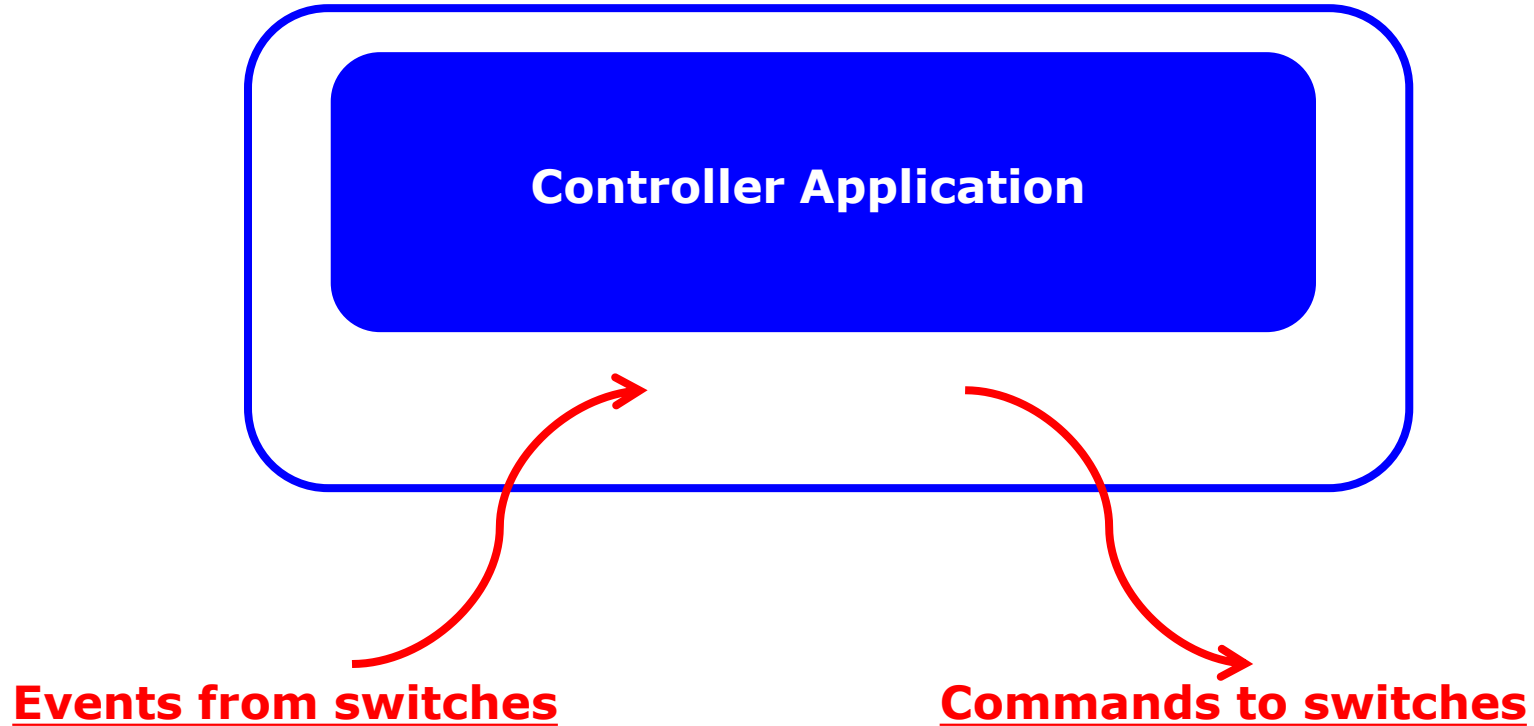

# SDN allows to unify different kinds of boxes

## ▶ Router

- ▶ Match: longest destination IP prefix
- ▶ Action: decrement TTL, re-compute header checksum, forward out a link

## ▶ Switch

- ▶ Match: destination MAC address
- ▶ Action: forward or flood

## ▶ Firewall

- ▶ Match: IP addresses and TCP/UDP port numbers
- ▶ Action: permit or deny

## ▶ NAT

- ▶ Match: IP address and port
- ▶ Action: rewrite address and port

**All the above boxes may be replaced by “generic” SDN switches whose behaviour is programmed in the controller**

By decoupling the network function from the physical infrastructure, the SDN approach is also useful to second another emerging trend in the telecommunications industry: *Network Function Virtualization (NFV)*

# A Short History of SDN




- ~2004: Research on new management paradigms
  - RCP, 4D [Princeton, CMU,....]
- 2006: Martin Casado, a PhD student at Stanford and team propose a clean-slate security architecture (SANE) which defines a centralized control of security (instead of at the edge as normally done)
- 2008: the idea of *Software Defined Network* is originated from **OpenFlow** project (ACM SIGCOMM 2008)
- 2009: Stanford publishes **OpenFlow** V1.0.0 specs
- June 2009: Martin Casado co-founds Nicira
- 2011: Open Networking Foundation (~69 members)
  - **Board:** Google, Yahoo, Verizon, DT, Msoft, F'book, NTT
  - **Members:** Cisco, Juniper, HP, Dell, Broadcom, IBM,.....
- 2012: OpenFlow in production use
- July 2012: VMware buys Nicira for **\$1.26B**

- **2012: Google employs SDN principles and OpenFlow to build:**
  - Jupiter: a data center interconnect capable of supporting more than 100,000 servers
  - B4: a WAN interconnecting its data centers to replicate data in real-time and better manage inter-DC traffic
- **2014: Some network equipment vendors start promoting their own SDN solutions, non Openflow compliant**
  - Cisco announced the OpFlex protocol
- **2014: The Open Networking Lab (ON.Lab) non-profit organization is founded by SDN inventors and leaders from Stanford University and UC Berkeley to foster open source communities for developing tools and platforms to realize the full potential of SDN, NFV and cloud technologies**
- **2016: Emerging SDN-based WAN solutions (SD-WAN)**
- **2017: Google announces that they will start partnering with leading mobile network operators, by building an SDN-based platform for operators to run their network services**

# An OS for networks thanks to SDN




- The whole network as one big machine
- The key is to have a standardized control interface that speaks directly to hardware

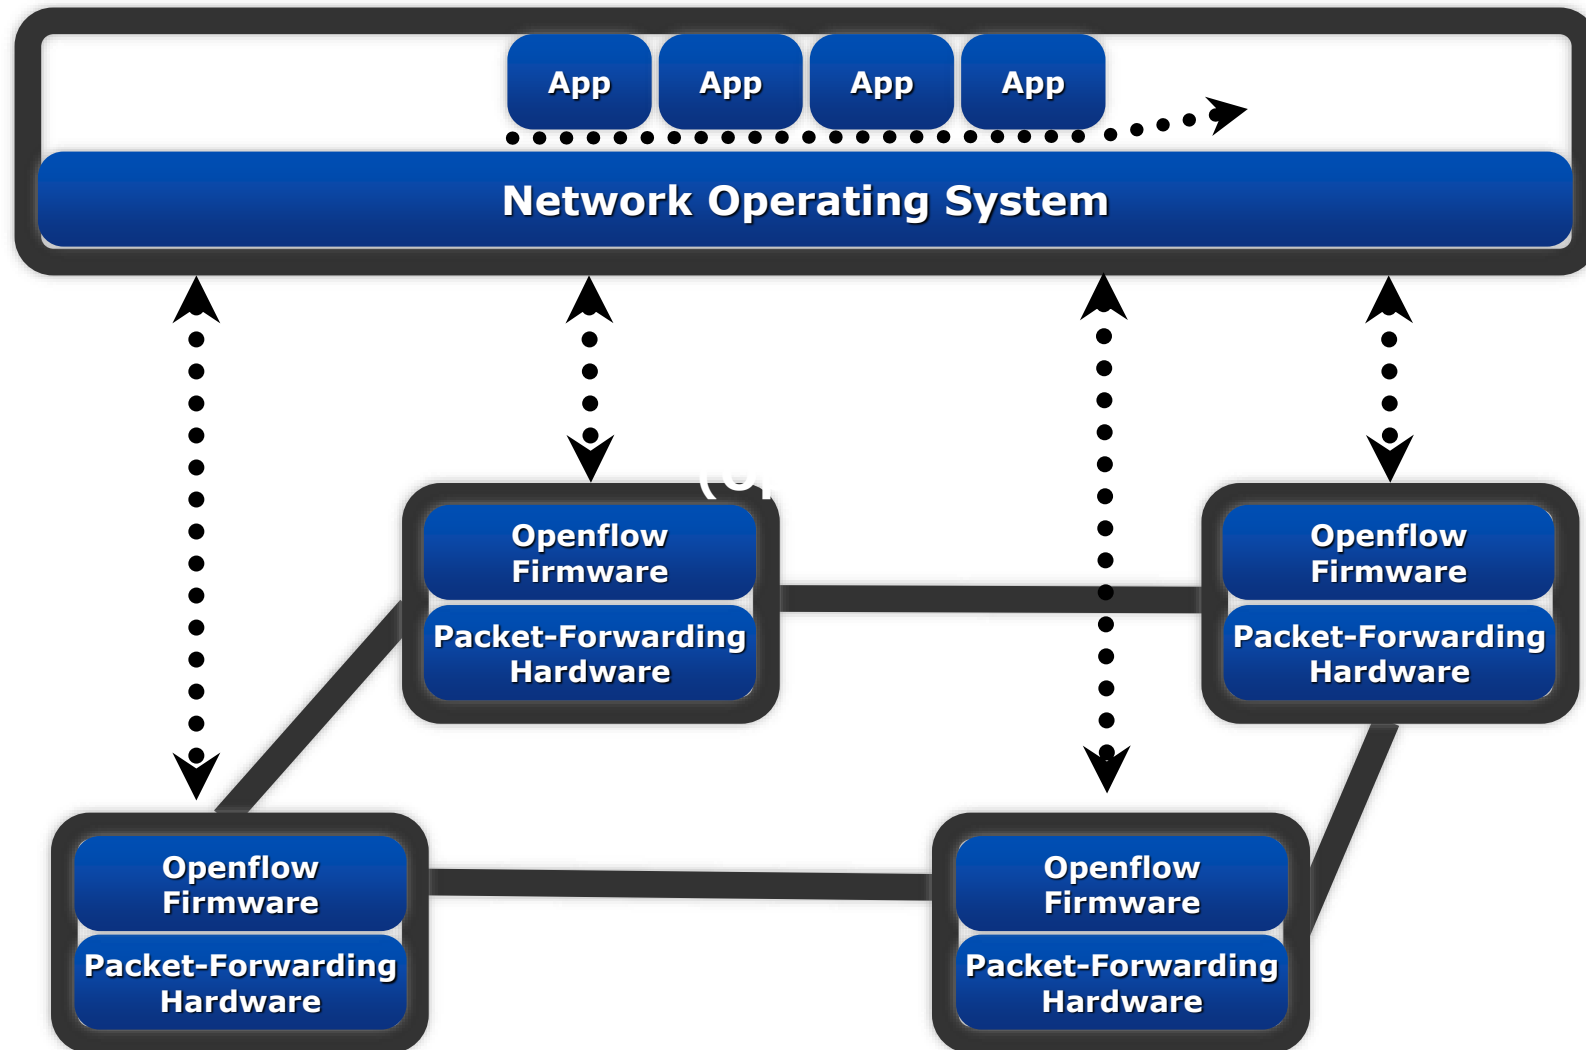


# The “Software-Defined Networking” (r)evolution




## Computer Industry

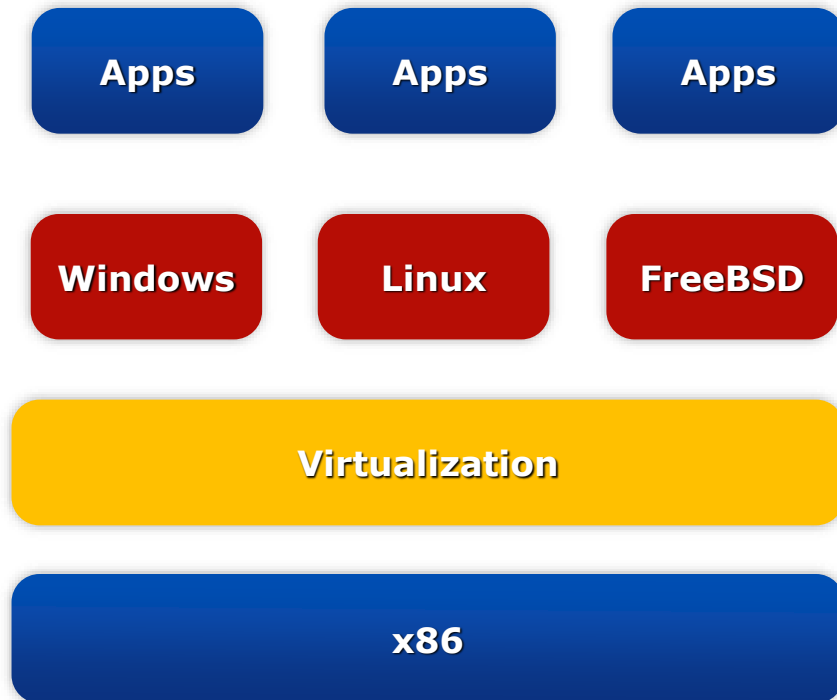

## Network Industry

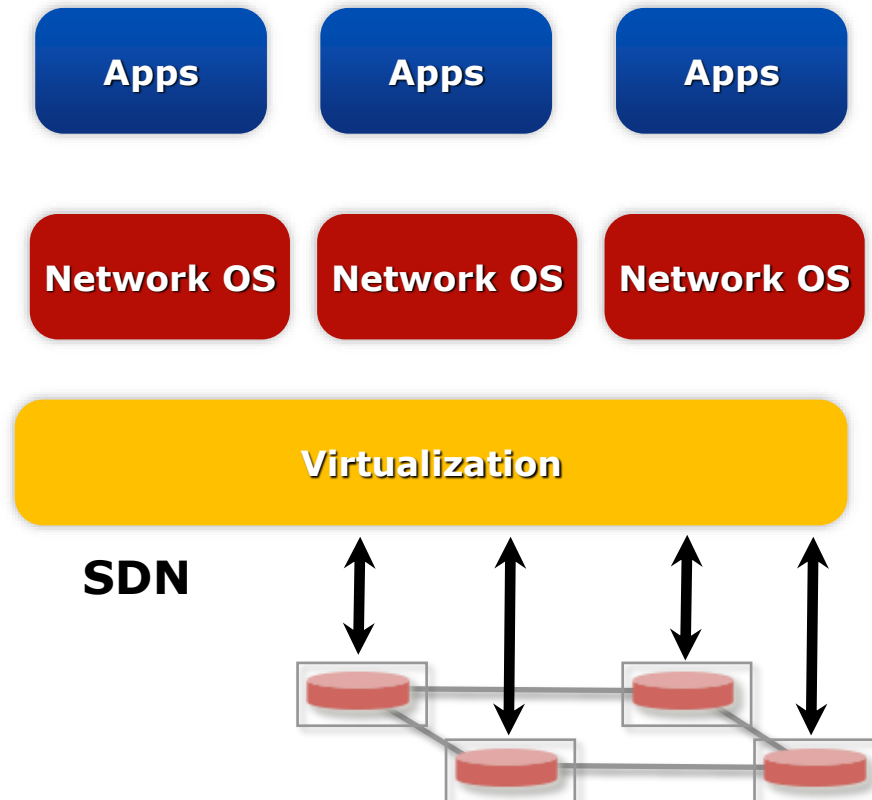

# Computers evolution: from mainframes to microprocessors

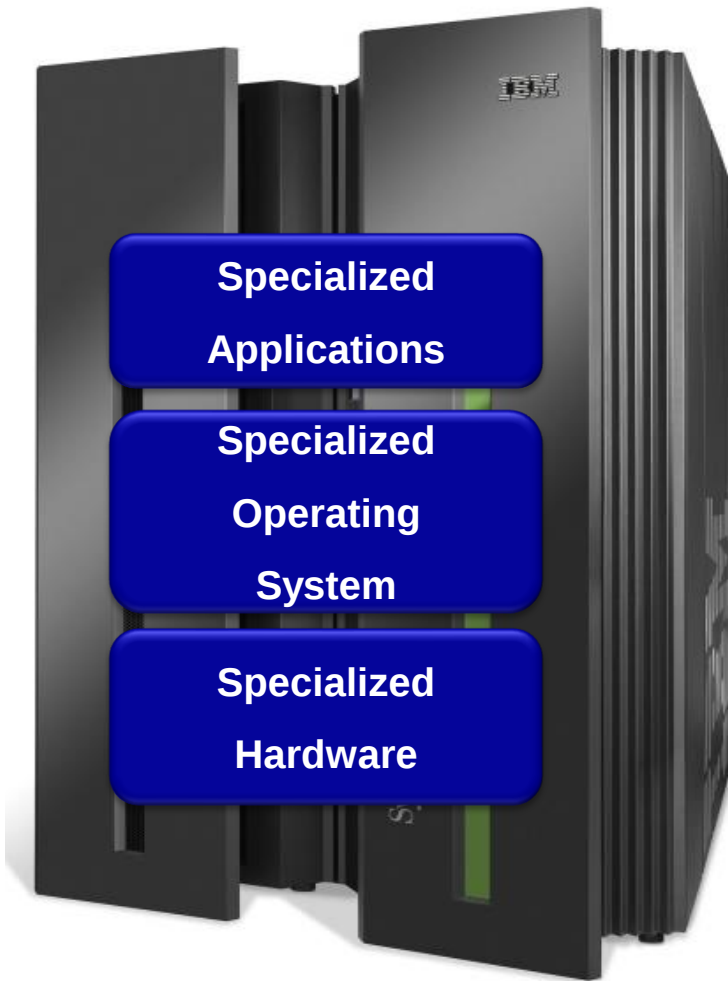


Vertically integrated  
Closed, proprietary  
Slow innovation  
Small industry

From Nick McKeown's talk "Making SDN Work" at the Open Networking Summit, April 2012



Horizontal  
Open interfaces  
Rapid innovation  
Huge industry

# SDN: the role of the Network Operating System

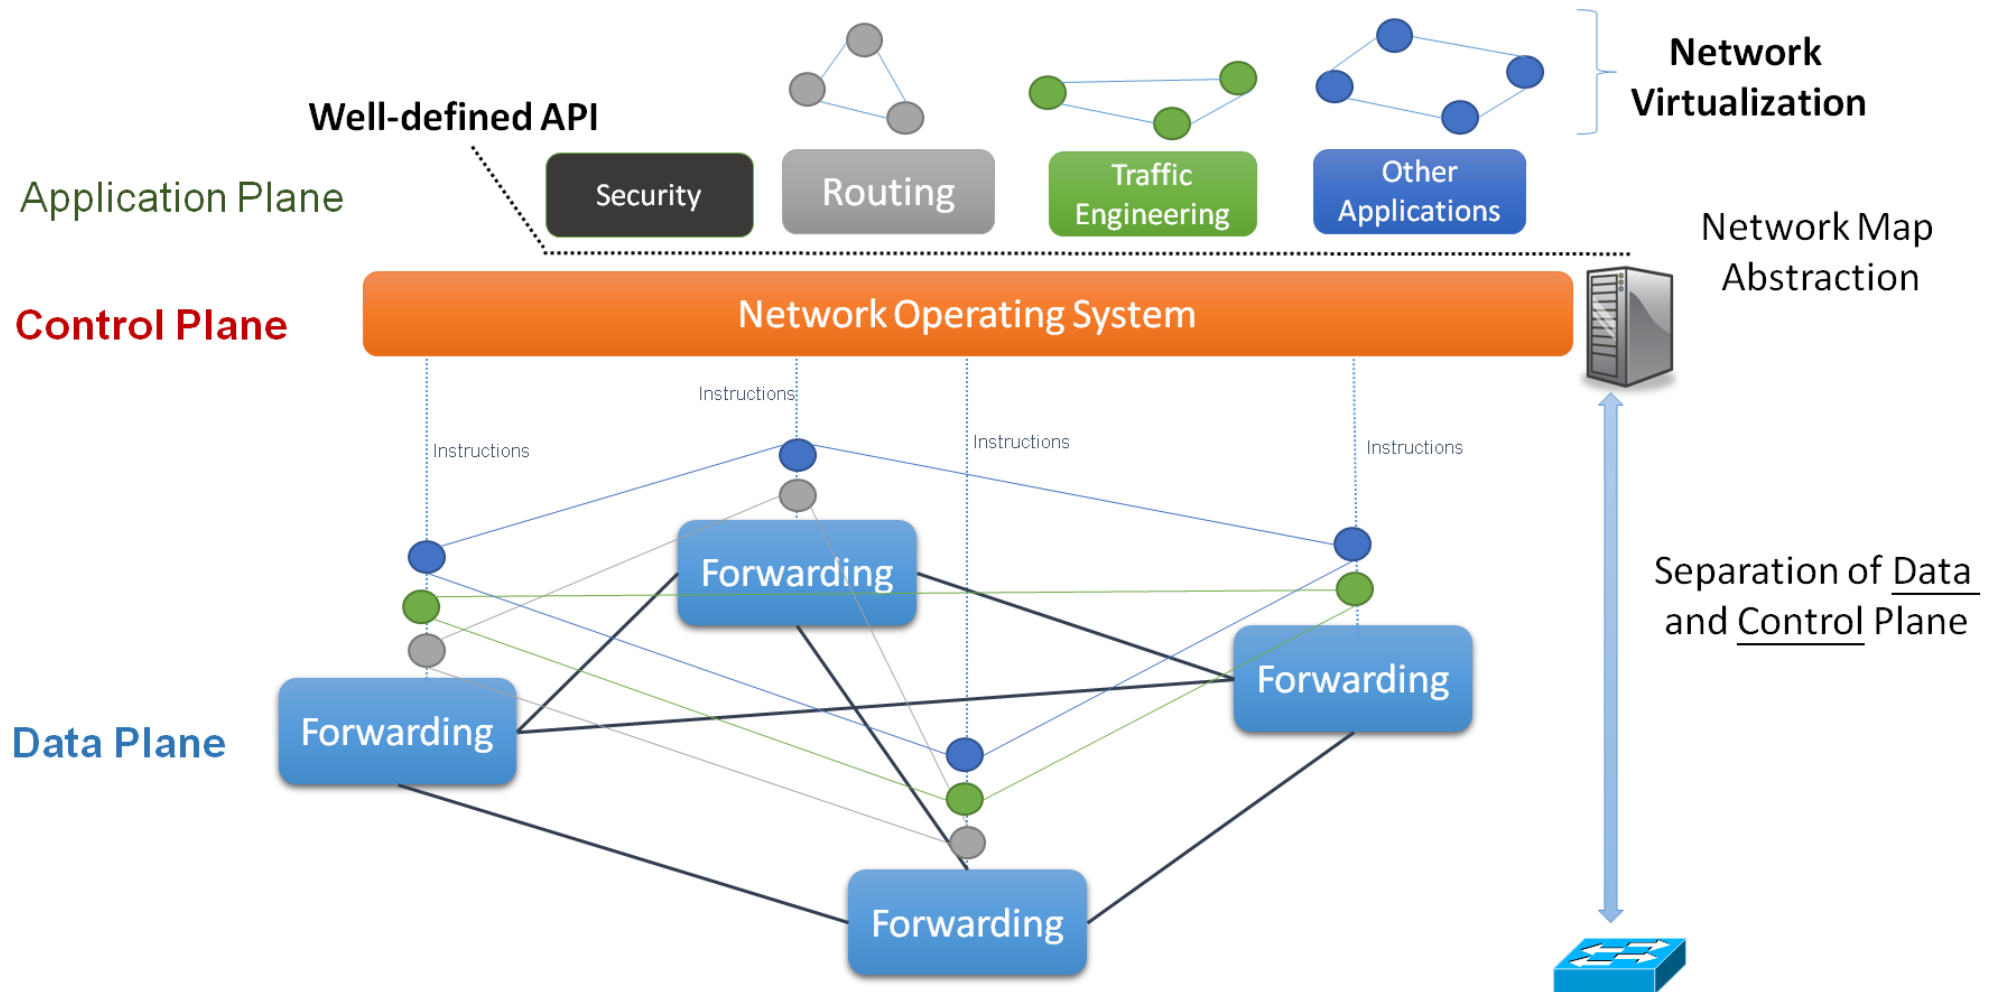

- ▶ **Scale-out router:**
  - ▶ Abstract view is single router
  - ▶ Physical network is collection of interconnected switches
  - ▶ Allows routers to “scale out, not up”
  - ▶ Use standard routing protocols on top
  
- ▶ **Multi-tenant networks:**
  - ▶ Each tenant has control over their “private” network
  - ▶ Network virtualization layer compiles all of these individual control requests into a single physical configuration
  
- ▶ **Hard to do without SDN, easy (*in principle*) with SDN**

# Does SDN work?



- |                                             |            |
|---------------------------------------------|------------|
| ▶ Is it scalable?                           | <b>Yes</b> |
| ▶ Is it less responsive?                    | <b>No</b>  |
| ▶ Does it create a single point of failure? | <b>No</b>  |
| ▶ Is it inherently less secure?             | <b>No</b>  |
| ▶ Is it incrementally deployable?           | <b>Yes</b> |

- ▶ **Control program: specify behavior on abstract model**
  - ▶ Driven by **Operator Requirements**
- ▶ **Network Virtualization: map abstract model to global view**
  - ▶ Driven by **Specification Abstraction**
- ▶ **NOS: map global view to physical switches**
  - ▶ API: driven by **Distributed State Abstraction**
  - ▶ Switch/fabric interface: driven by **Forwarding Abstraction**



- ▶ **Multi-tenant “virtualized” data centers**
  - ▶ Public and private clouds
  
- ▶ **WANs**
  - ▶ Google WAN
  - ▶ Eventually, public WANs
  
- ▶ **Enterprise networks**
  - ▶ Greater control, fewer middleboxes

# Where SDN is and will be deployed (2)




- ▶ **Home networks**
  - ▶ Outsourced management
  
- ▶ **Cellular Networks**
  - ▶ Separation of service from physical infrastructure
  
- ▶ **Research and Education Networks**
  - ▶ National backbones
  - ▶ College campus networks


# Challenge: controller delay and overhead



- ▶ Controller is much slower than the switch
- ▶ Processing packets leads to delay and overhead
- ▶ Need to keep most packets in the “fast path”

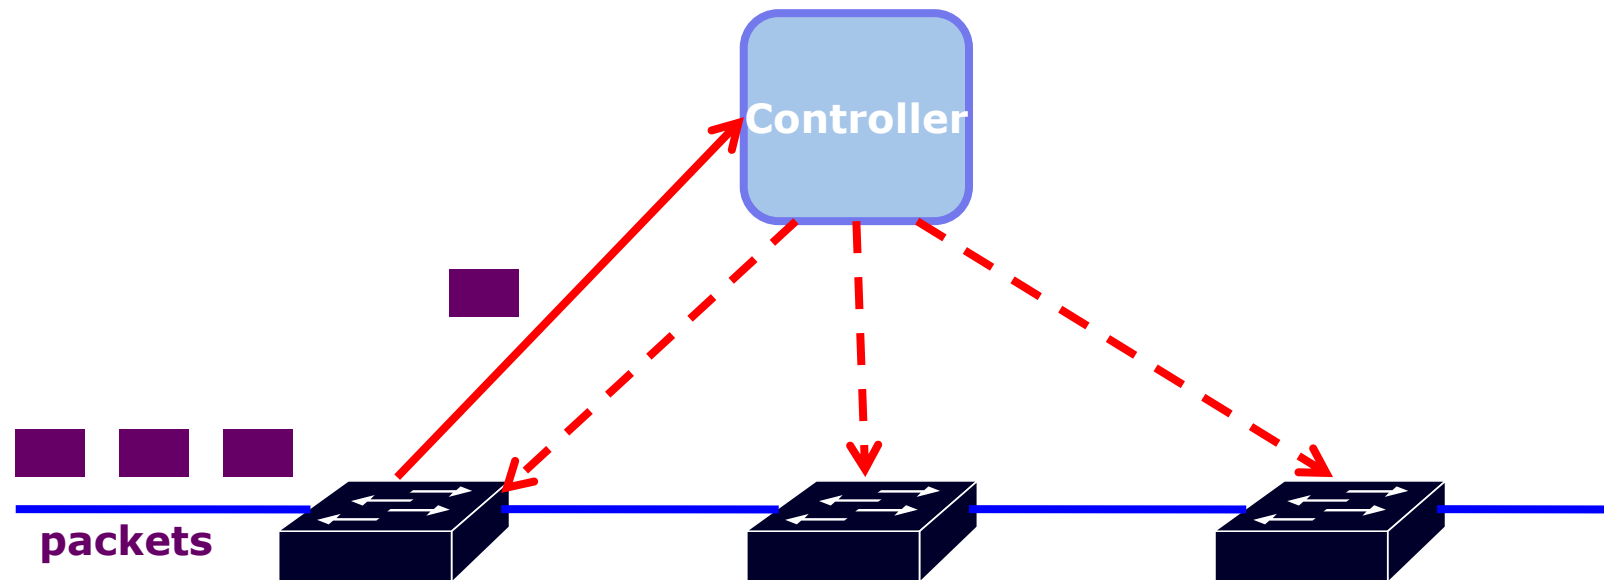

# SDNs with distributed controllers

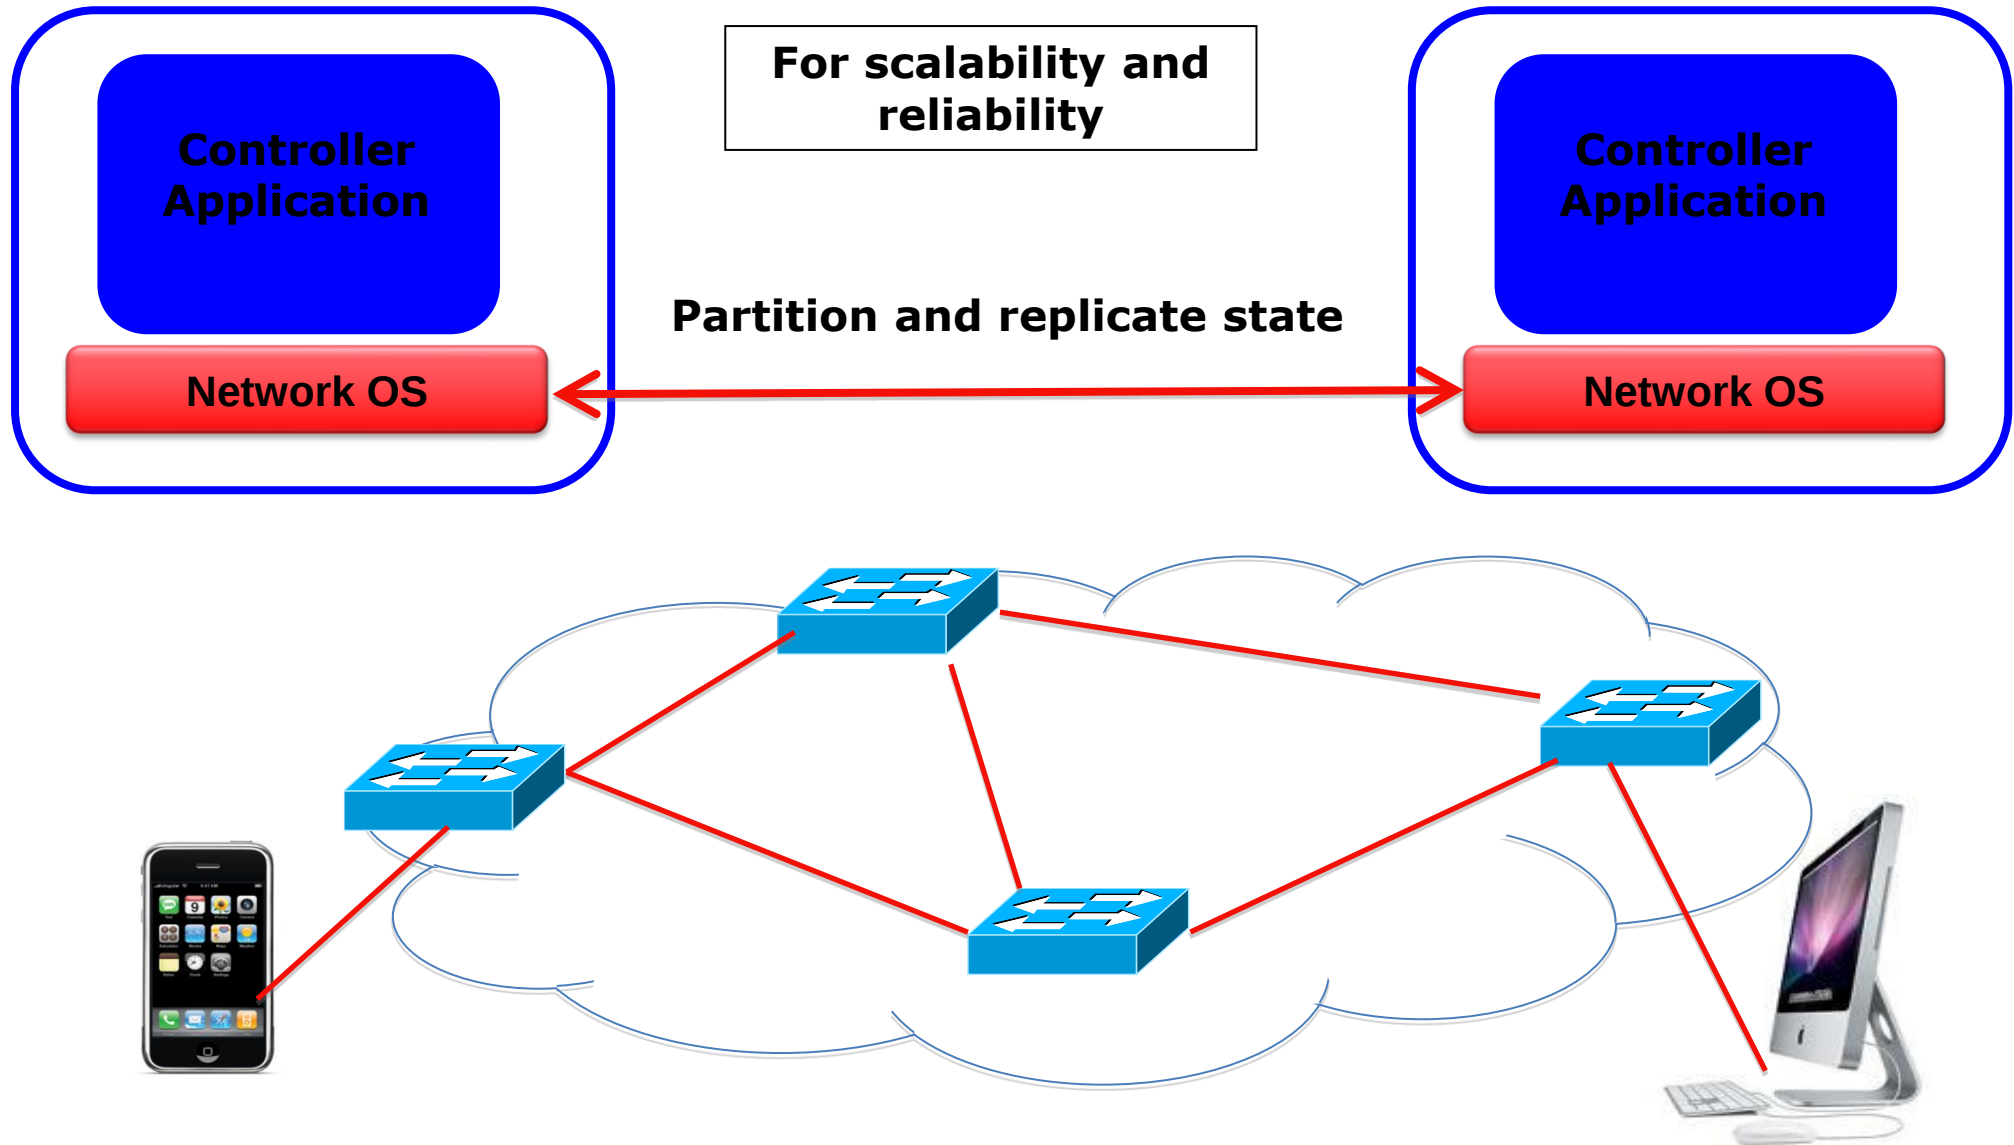




- ▶ **OpenFlow makes programming possible**
  - ▶ Network-wide view at controller
  - ▶ Direct control over data plane
- ▶ **Plenty of room for bugs**
  - ▶ Still a complex, distributed system
- ▶ **Need for testing techniques**
  - ▶ Controller applications
  - ▶ Controller and switches
  - ▶ Rules installed in the switches

# Challenge: programming abstractions




- ▶ Controller APIs are low-level
  - ▶ Thin layer on top of the underlying hardware
- ▶ Need better languages
  - ▶ Composition of modules
  - ▶ Managing concurrency
  - ▶ Querying network state
  - ▶ Network-wide abstractions

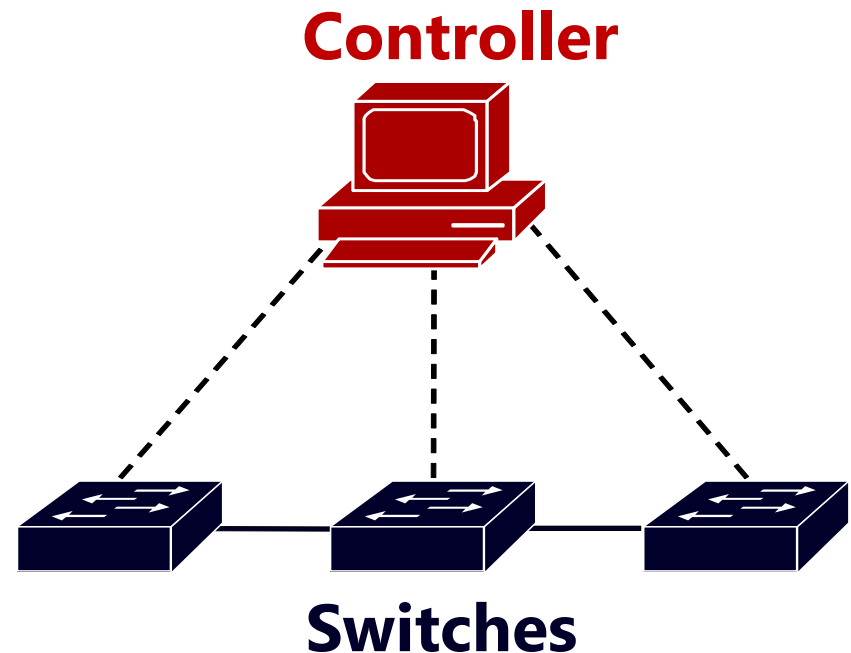


# SDN use case: Dynamic Access Control



- ▶ Inspect first packet of a connection
- ▶ Consult the access control policy
- ▶ Install rules to block or route traffic

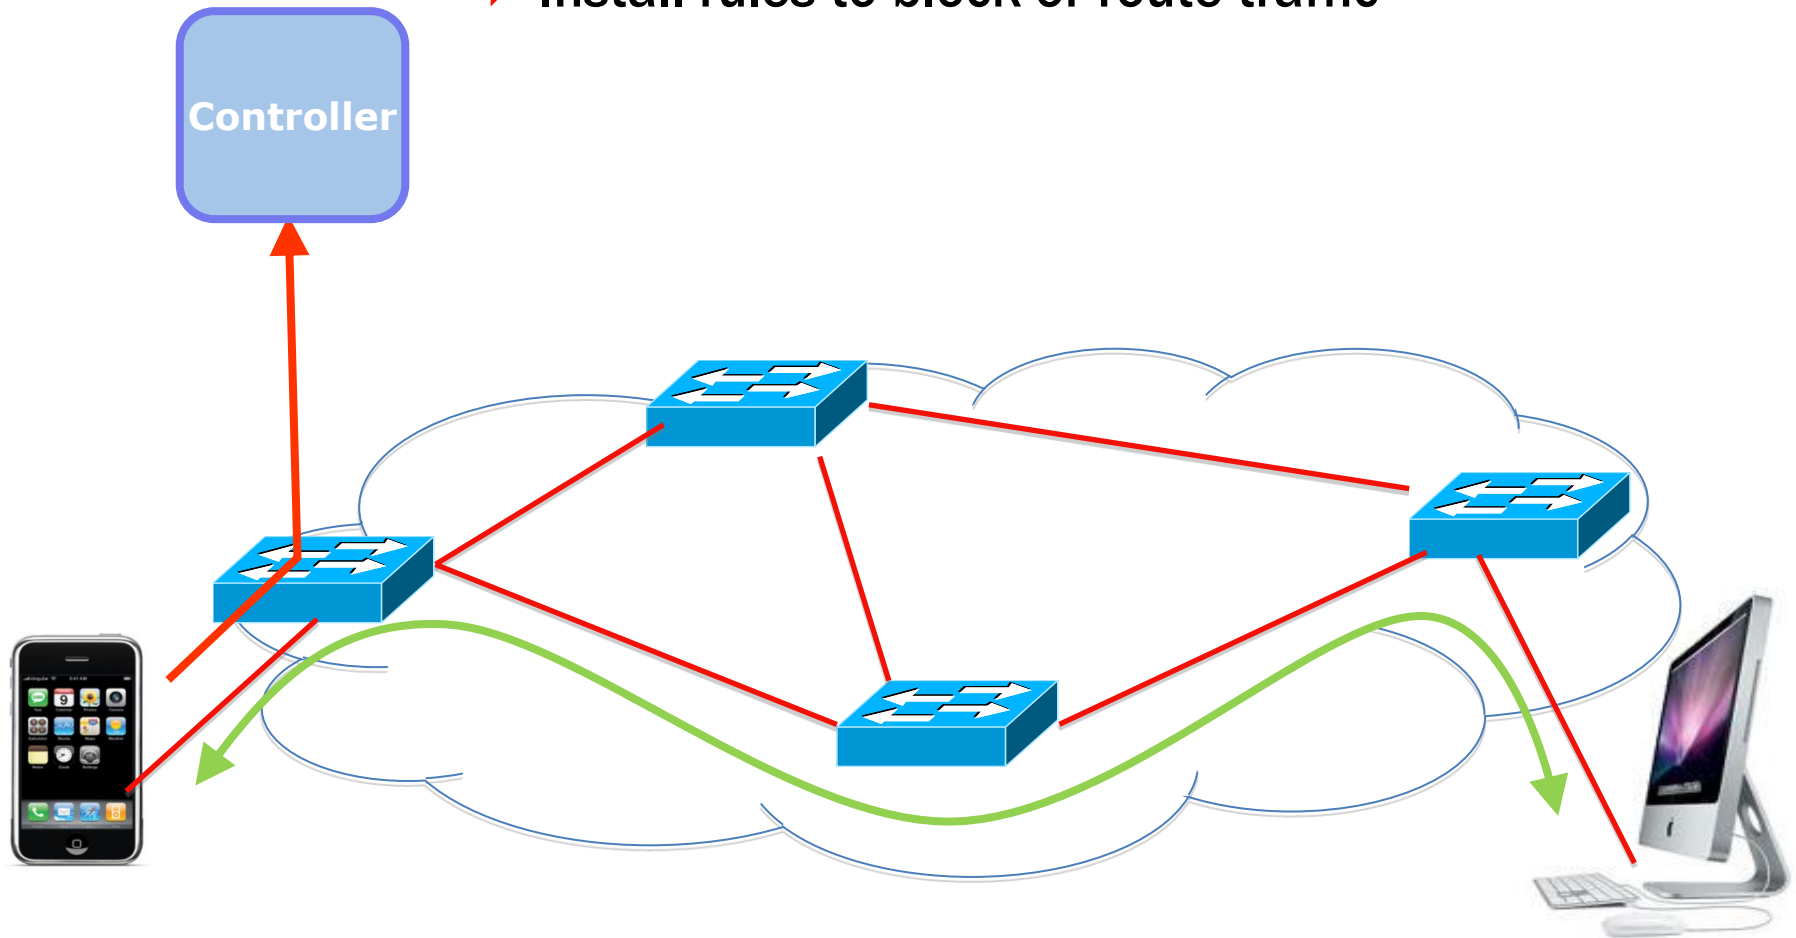


- ▶ See host send traffic at new location
- ▶ Modify rules to reroute the traffic

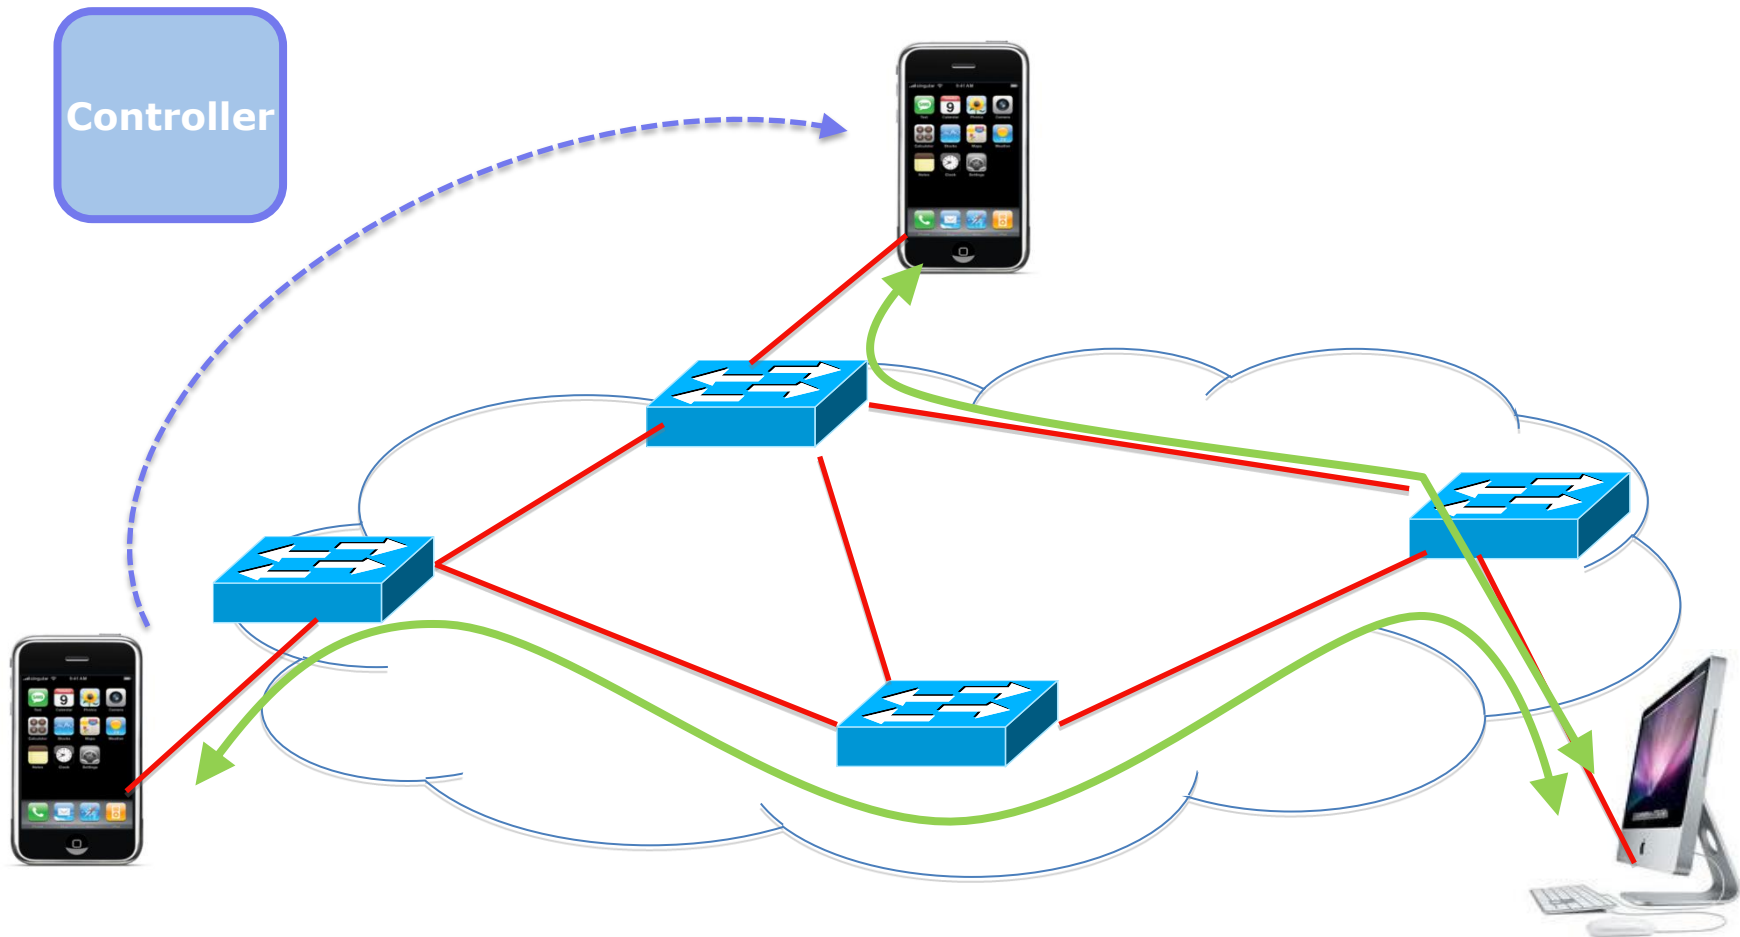

# SDN use case: Server Load Balancing



- ▶ Pre-install load-balancing policy
- ▶ Split traffic based on source IP

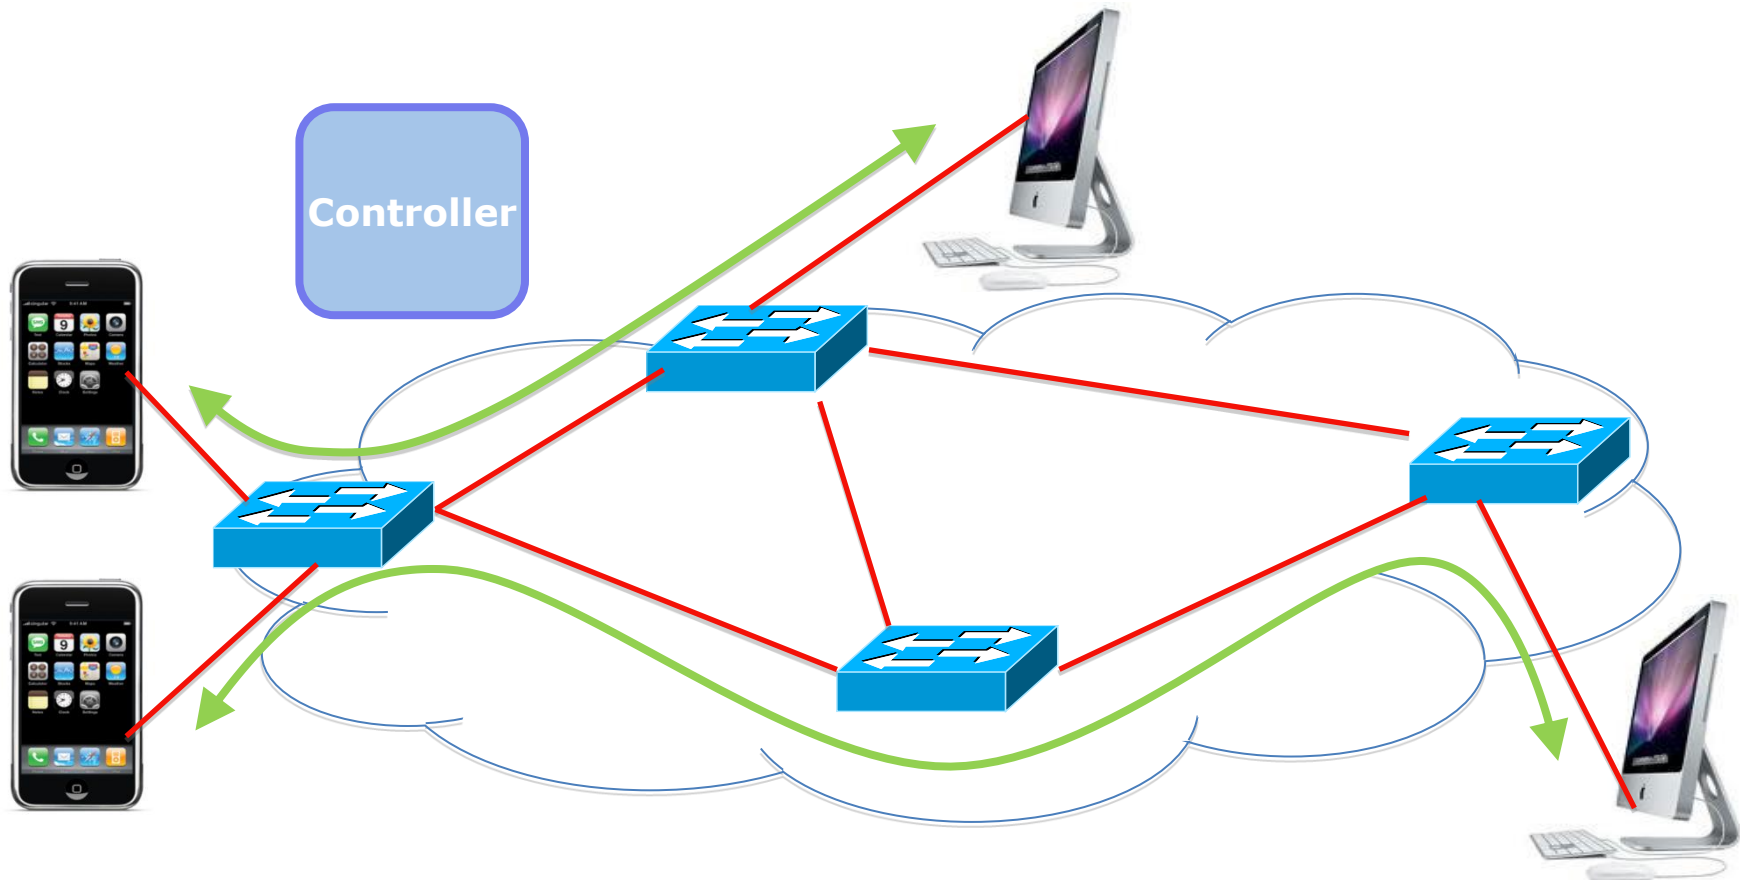

# SDN use case: Network Virtualization




**Controller #1**

**Controller #2**

**Controller #3**


**Partition the space of packet headers**

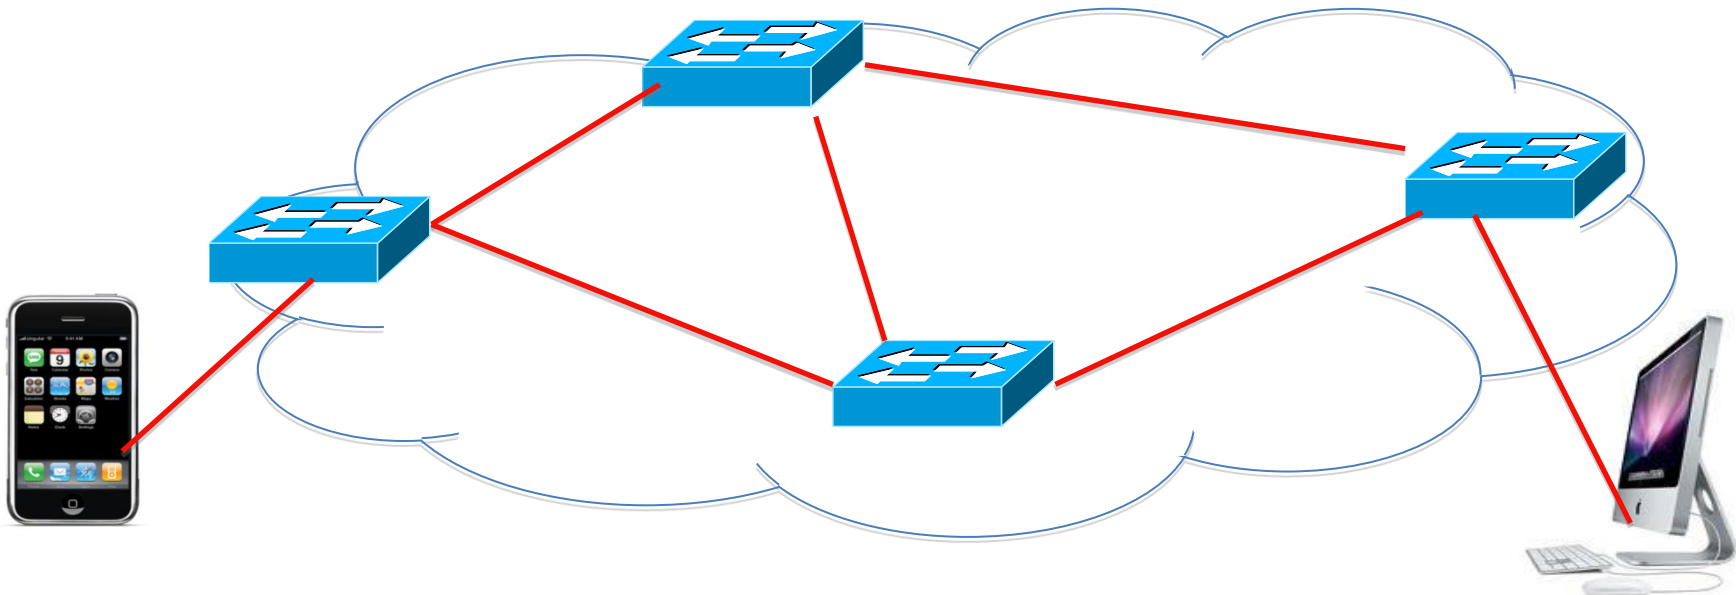

# SDN use case: multi-tenant datacenter



- ▶ In a multi-tenant datacenter, the cloud provider has to implement and manage mechanisms to isolate traffic of different tenants both in the network and in the hypervisors
- ▶ With SDN connectivity between VMs is controlled by network automation and programming
- ▶ SDN extends its action in the hypervisor through software v-switches

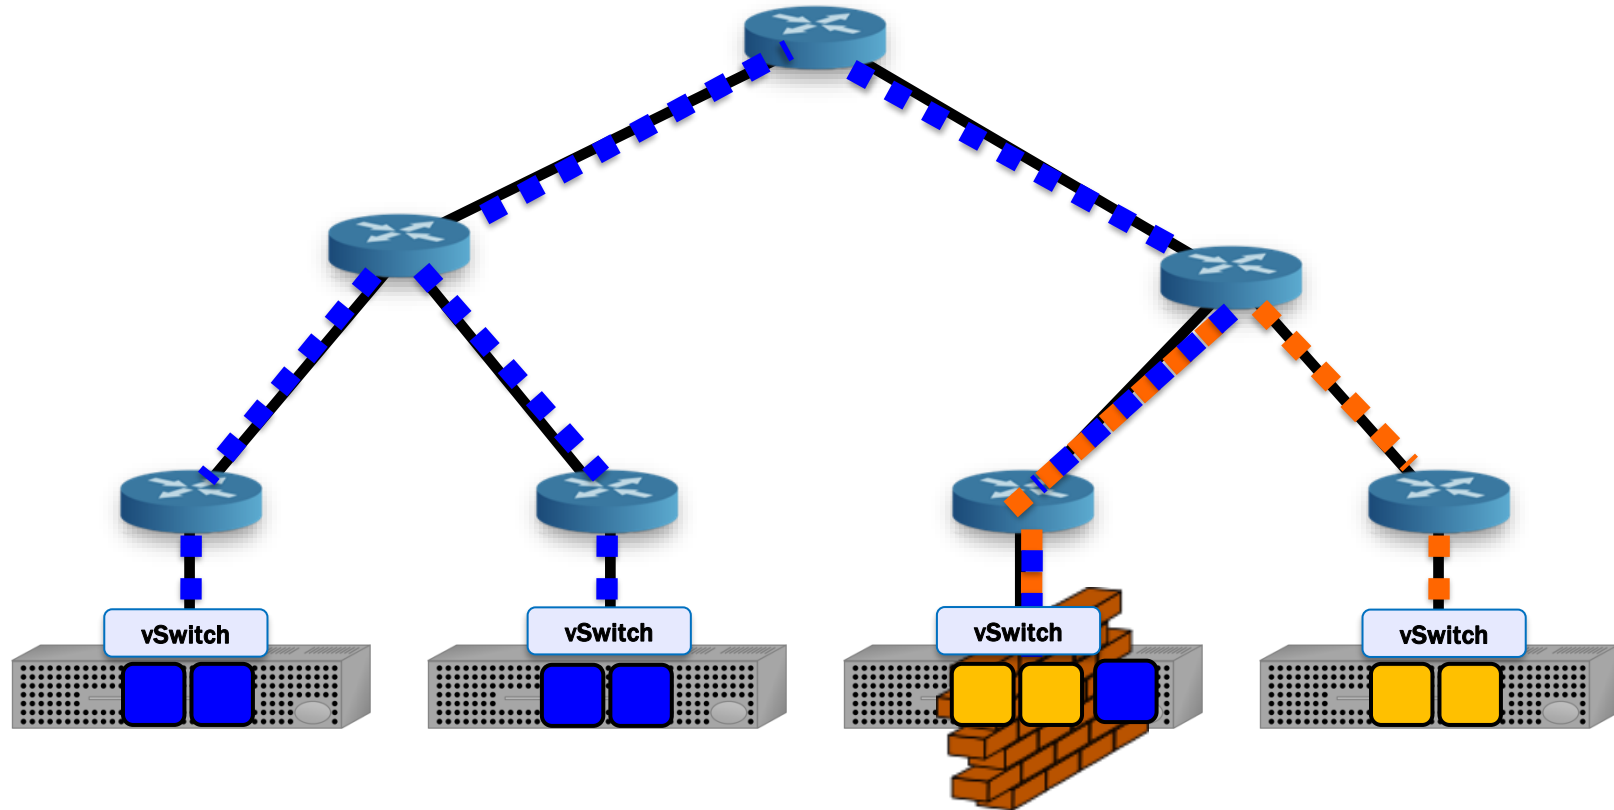



- ▶ The industries were skeptical whether SDN was possible
- ▶ Google had big problems:
  - ▶ **High financial cost** managing their datacenters: Hardware and software upgrade, over provisioning (fault tolerant), manage large backup traffic, time to manage individual switch, and a lot of men power to manage the infrastructure
  - ▶ **Delay** caused by rebuilding connections after link failure
    - ▶ Slow to rebuild the routing tables after link failure
    - ▶ Difficult to predict what the new network may perform
- ▶ Google went ahead and implemented SDN
  - ▶ Built their hardware and wrote their own software for their internal datacenters
  - ▶ Surprised the industries when Google announced SDN was possible in production
- ▶ How did they do it?
  - ▶ *“B4: Experience with a Globally-Deployed Software Defined WAN”*, ACM SIGCOMM 2013

- ▶ ***OpenFlow: Enabling innovation in campus networks.***  
Nick McKeown, Tom Anderson, Hari Balakrishnan, Guru Parulkar, Larry Peterson, Jennifer Rexford, Scott Shenker, and Jonathan Turner.  
ACM SIGCOMM Computer Communication Review. Volume 38 Issue 2, April 2008
- ▶ ***Origins and Evolution of OpenFlow/SDN.***  
Martin Casado.  
*Open Networking Summit, Stanford, CA, October 2011.* (Video available on YouTube)
- ▶ ***Software-Defined Networking: A Comprehensive Survey.***  
Diego Kreutz, Fernando M. V. Ramos, Paulo Esteves Verissimo, Christian Esteve Rothenberg, Siamak Azodolmolky, Steve Uhlig.  
Proceedings of the IEEE, vol.103, no.1, pp.14–76, Jan. 2015
- ▶ ***B4: Experience with a Globally-Deployed Software Defined WAN.***  
Sushant Jain, Alok Kumar, Subhasree Mandal, Joon Ong, Leon Poutievski, Arjun Singh, Subbaiah Venkata, Jim Wanderer, Junlan Zhou, Min Zhu, Jonathan Zolla, Urs Hölzle, Stephen Stuart and Amin Vahdat.  
ACM SIGCOMM Computer Communication Review. Volume 43 Issue 4, October 2013
- ▶ **Open Network Foundation.**  
<http://opennetworking.org>
- ▶ **IEEE SDN Technical Committee.**  
<http://sdn.ieee.org/education>